V 26.1

其它系列 CHIKU® 电气产品选型手册，欢迎垂询索取！

For more info, please contact us.

HUNTEC

SUZHOU HUNTEC INT'L TRADING CO., LTD.
Add.: 36 zijing street, Mudu Town, Wuzhong District,Suzhou, Jiangsu Province, China
Factory: Jiangxi Huntec Electrical Technology Co.,Ltd.
Add.:1829th Yangguang Avenue, Xinyu, Jiangxi Province, China
Email: info@cnhuntec.com
Tel: +86-0512-65577928
Website: www.cnhuntec.com
www.chikucontact.com

All images are reference only,any change without notification previously.All details and data subject to our final confirmation.

Sys - Function Contact Selection Guide

HUNTEC



CABLE GLAND

Electrical Connection Protection

Selection Guide

电联防护系统选型手册

+ 关于我们
About Us



人　　员：共有员工1,000余人，其中研发和工程人员技术人员占比15%
服务网络：设立有上海、深圳、东莞、北京、南京、苏州、合肥等营销和服务中心
设计制造：产品设计、模具设计及制造、冲压、车削、注塑、组装测试的全链条生产，拥有独立的知识产权
证书及体系：国家高新技术企业、省级科研中心、CNAS认可实验室、ISO9001等三体系合一，TUV、UL、CE、CQC等认证

Personnel: More than 1,000 employees, of which R&D engineers account for 15%

Service network: Direct marketing and service centers in Shanghai, Shenzhen, Dongguan, Beijing, Nanjing, Suzhou and Hefei.

Design and manufacture: Full-chain production of product design, mold design and manufacturing, stamping, turning, injection molding, assembly and testing, with independent intellectual property.

Certificates and systems: National high-tech enterprises, provincial scientific research centers, CNAS accredited laboratories, ISO9001, etc. Three systems in one, TUV, UL, CE, CQC and other certifications.

质量方针/Quality Policy：

严谨求实/Rigorous and realistic, 卓越品质/Excellent quality
优良服务/Excellent service, 持续发展/Sustainable development

COMPANY PROFILE

COMPANY VISION

企业愿景

we are committed to keeping China's electric connection technology in step with the world.

Creat better return on investment and experience for global customers.

致力于让中国电连接技术与世界同步

为全球客户创造更佳投资回报和体验

COMPANY MISSION

企业使命

We are committed to providing professional electrical connection solutions for our partners

矢志为合作伙伴提供专业电连接解决方案

COMPANY VALUE

企业价值观

Same goal,same ideal,
fighting together !

航者远 • 同欲胜











吸收创新　真诚信任　自主制造

Absorption Innovation • Sincere Trust • Independent Manufacturing

应用领域 / Application Areas

风力光伏发电 / Wind power＆solar photovoltaic power generation

在全球双碳机制下的当今，光伏发电具有清洁性、安全性、广泛性、充足性及潜在的经济性等优点，
在长期的能源战略中具有重要地位。

Under the current global dual-carbon mechanism, photovoltaic power generation has the advantages of cleanliness, safety, ubiquity, sufficiency and potential economy, and plays an important role in the long-term energy strategy.

船舶制造 / Shipbuilding

提升造船行业主要配件和专用设备广泛国产化，提供更优质的电缆和设备保护解决方案。

Improve the extensive localization of major accessories and special equipment in the shipbuilding industry, and provide better cable and equipment protection solutions.

工业自动化 / Automated industry

随着工业4.0时代的来临，对高精度智能化设备电气连接有更高需求，
我们的产品稳定性和耐用性、精密性，
经过各项检测，更加广泛地用于机械制造和电气工程领域。

With the advent of the era of Industry 4.0, there is a higher demand for the electrical connection of high-precision intelligent equipment.
Our product stability and durability, precision, After various tests, it is more widely used in the fields of mechanical manufacturing and electrical engineering.

新能源汽车 / New energy vehicles

新能源汽车是指采用非常规的车用燃料作为动力来源（或使用常规的车用燃料、采用新型车载动力装置），
具有新技术、新结构的汽车。
我们的产品在保护线缆和设备起到了重要作用。

New energy vehicles refer to vehicles with new technologies and new structures that use unconventional vehicle fuels as power sources (or use conventional vehicle fuels and new vehicle power units).
Our products play an important role in protecting cables and equipment.

做电气连接行业领导者

To Be The Leader In Electrical Connection







+ Application field





产品目录
Product Catalog

Products Content

RSKP-...普通尼龙防水接头
Waterproof nylon cable gland 01

RSKP-...N×D 多芯尼龙防水接头
Multi–core nylon cable gland 10

RPK-...-Ex 防爆尼龙防水接头
Explosion–proof nylon cable gland 12

RSKP-...-D多衬套尼龙防水接头
Multilayer series waterproof nylon cable gland 16

RSFP 法兰式尼龙防水接头
Flanged nylon waterproof joint 20

RSKP-...端子防护罩
Terminal Cover 22

RSKP-...-F 分体式尼龙防水接头
Split nylon waterproof joint cable gland 23

RHQCF-... 分体式防水型软管接头
Split waterproof hose nylon joint 24

RPK-... 尼龙闷盖
Nylon blanking plug 25

RXT-...堵塞头/RPT-... 堵塞头/RMK-... 尼龙螺母
Nylon screw plug / Nylon lock–nut 26

RSKM 普通金属电缆防水接头
Waterproof metal cable gland 32

RSKM-...-N×D 普通多芯金属电缆防水接头
Waterproof metal cable gland with multi cores 33

RSKM2 全硅胶金属电缆防水接头
All silicone waterproof metal cable gland 34

RSKM-EMV.SP-M 弹簧式屏蔽金属电缆防水接头
Spring shielded metal cable gland 36

IP防护等级说明
Protection Level Descriptions 37

螺纹标准和开孔数据
Thread standard 38



江西航同 爱搓文件

RS系列 尼龙防水接头

Waterproof nylon cable gland

RSKP系列尼龙电缆接头满足更高质量的电气要求，采用PA尼龙材质，提供不同的夹紧范围、螺纹长度、螺纹类型。

Series nylon cable glands meet higher quality electrical requirements, are made of PA nylon and offer different clamping ranges, thread lengths, thread types.

cULus Ex CE IP68 RoHS

RSKP 电缆防水接头型号规格命名方法/Cable waterproof connector model specification naming method

RSKP－M25A－3x6－L－BL

- 颜色/Colour ： BL黑色/Black GY灰色/Grey
- 螺纹加长型，普通型不写/Thread extension type, ordinary type do not write.
- 多芯结构，3x6：表示 孔数目为3 孔直径为6mm，单芯结构不写
  Multi－core structure 3x6: indicates that 3 holes and the hole diameter is 6mm.
  (The single－core structure do not write.)
- 区分卡线范围:Distinguish the card line range
- 螺纹大小规格/Thread size specification
- M：公制螺纹，P：德制螺纹（PG），N：美制螺纹（NPT），G：英制螺纹
  M: Metric thread, P: German thread (PG), N: American thread (NPT), G: Inch thread
- RSKP：尼龙电缆防水接头/Nylon waterproof cable gland

基本选型：

1、确定接头材质
2、依电缆直径选好卡线范围
3、以固位孔直径选好螺纹规格
4、根据需要选好颜色

Basic selection:

1. Determine the cable gland material
2. Select the cable range according to the diameter of the cable
3. Select the thread specification according to the diameter of the retaining hole
4. Choose the color according to your needs

* 其它特殊要求请与相关技术员协商
* For other special requirements, please consult with the relevant technicians



RSKP-N-M 尼龙防水接头/Waterproof nylon cable gland



* 特殊规格请垂询
Pre－install Oring or other colors please consult us

- 塑料材料：PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： O型圈或平垫圈自选，连接更紧密
  改进型护套，保护连接安全

- Material ： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O－ring，IP68
- Temperature Limited：－40℃－100℃，short－ term120℃
- Products Feature： Connecting more smoothly &closely with double－thread & O－ring groove. Protecting connection safe by using improved protective sealings



型号 Thread Spec.	颜色 Color	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
M12×1.5		3-6.5	12	8	21	15	15	Φ12.2-Φ12.4	RSKP-M12A(N)
M12×1.5	黑色/BK 灰色/GY	2-5	12	8	21	15	15	Φ12.2-Φ12.4	RSKP-M12B(N)
M12×1.5		4-8	12	8	22	19	19	Φ12.2-Φ12.4	RSKP-M12C(N)
M16×1.5		4-8	16	8	22	19	19	Φ16.2-Φ16.4	RSKP-M16A(N)
M16×1.5		3-6	16	8	22	19	19	Φ16.2-Φ16.4	RSKP-M16B(N)
M16×1.5	黑色/BK 灰色/GY	5-10	16	8	25	22	22	Φ16.2-Φ16.4	RSKP-M16C(N)
M16×1.5		4-8	16	8	25	22	22	Φ16.2-Φ16.4	RSKP-M16E1(N)
M16×1.5		1.5-3	16	8	22	19	19	Φ16.2-Φ16.4	RSKP-M16F(N)
M18×1.5		5-10	18	8	25	22	22	Φ18.2-Φ18.4	RSKP-M18A(N)
M18×1.5	黑色/BK 灰色/GY	4-7	18	8	25	22	22	Φ18.2-Φ18.4	RSKP-M18B(N)
M18×1.5		4-8	18	8	25	22	22	Φ18.2-Φ18.4	RSKP-M18E(N)
M20×1.5		7-12	20	9	27	24	24	Φ20.2-Φ20.4	RSKP-M20A(N)
M20×1.5	黑色/BK 灰色/GY	5-9	20	9	27	24	24	Φ20.2-Φ20.4	RSKP-M20B(N)
M20×1.5		10-15	20	10	28	27	27	Φ20.2-Φ20.4	RSKP-M20C(N)
M22×1.5		10-15	22	10	28	27	27	Φ22.2-Φ22.4	RSKP-M22A(N)
M22×1.5	黑色/BK 灰色/GY	7-12	22	10	28	27	27	Φ22.2-Φ22.4	RSKP-M22B(N)
M22×1.5		6-10	22	10	28	27	27	Φ22.2-Φ22.4	RSKP-M22E(N)
M25×1.5		14-18	25	11	31	33	33	Φ25.2-Φ25.4	RSKP-M25A(N)
M25×1.5		11-16	25	11	31	33	33	Φ25.2-Φ25.4	RSKP-M25B(N)
M25×1.5	黑色/BK 灰色/GY	8-13	25	11	31	33	33	Φ25.2-Φ25.4	RSKP-M25G(N)
M25×1.5		4-6	25	11	31	33	33	Φ25.2-Φ25.4	RSKP-M25H(N)
M25×1.5		2-4	25	11	31	33	33	Φ25.2-Φ25.4	RSKP-M25J(N)
M32×1.5	黑色/BK 灰色/GY	18-25	32	11	39	42	42	Φ32.2-Φ32.4	RSKP-M32A(N)
M32×1.5		13-20	32	11	39	42	42	Φ32.2-Φ32.4	RSKP-M32B(N)
M40×1.5		24-32	40	13	44	53	53	Φ40.3-Φ40.5	RSKP-M40A(N)
M40×1.5	黑色/BK 灰色/GY	20-28	40	13	44	53	53	Φ40.3-Φ40.5	RSKP-M40B(N)
M40×1.5		22-29	40	13	44	53	53	Φ40.3-Φ40.5	RSKP-M40F(N)
M50×1.5	黑色/BK 灰色/GY	32-38	50	13	48	60	60	Φ50.3-Φ50.5	RSKP-M50A(N)
M50×1.5		25-31	50	13	48	60	60	Φ50.3-Φ50.5	RSKP-M50B(N)
M63×1.5	黑色/BK 灰色/GY	37-44	63	14	48	65	68	Φ63.3-Φ63.5	RSKP-M63A(N)
M63×1.5		29-35	63	14	48	65	68	Φ63.3-Φ63.5	RSKP-M63B(N)
M72×2.0	黑色/BK 灰色/GY	51-57	72	16	54	81	85	Φ72.3-Φ72.5	RSKP-M72A(N)
M72×2.0		43-53	72	16	54	81	85	Φ72.3-Φ72.5	RSKP-M72B(N)

RSKP-N-M-L 尼龙防水接头（加长）/Waterproof nylon cable gland（increased length）



- 塑料材料： PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： O型圈或平垫圈自选，连接更紧密
  改进型护套，保护连接安全

- Material ： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O–ring，IP68
- Temperature Limited：–40℃–100℃，short– term120℃
- Products Feature： Connecting more smoothly &closely with double–thread & O–ring groove. Protecting connection safe by using improved protective sealings



* 特殊规格请垂询
Pre–install Oring or other colors please consult us

型号 Thread Spec.	颜色 Color	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
M12×1.5	黑色/BK 灰色/GY	3-6.5	12	15	21	15	15	Φ12.2-Φ12.4	RSKP-M12A-L(N)
M12×1.5		2-5	12	15	21	15	15	Φ12.2-Φ12.4	RSKP-M12B-L(N)
M16×1.5		4-8	16	15	22	19	19	Φ16.2-Φ16.4	RSKP-M16A-L(N)
M16×1.5		3-6	16	15	22	19	19	Φ16.2-Φ16.4	RSKP-M16B-L(N)
M16×1.5	黑色/BK 灰色/GY	5-10	16	15	25	22	22	Φ16.2-Φ16.4	RSKP-M16C-L(N)
M16×1.5		4-8	16	15	25	22	22	Φ16.2-Φ16.4	RSKP-M16E1-L(N)
M16×1.5		1.5-3	16	15	22	19	19	Φ16.2-Φ16.4	RSKP-M16F-L(N)
M18×1.5		5-10	18	15	25	22	22	Φ18.2-Φ18.4	RSKP-M18A-L(N)
M18×1.5	黑色/BK 灰色/GY	4-7	18	15	25	22	22	Φ18.2-Φ18.4	RSKP-M18B-L(N)
M18×1.5		4-8	18	15	25	22	22	Φ18.2-Φ18.4	RSKP-M18E-L(N)
M20×1.5		6-12	20	15	27	24	24	Φ20.2-Φ20.4	RSKP-M20A-L(N)
M20×1.5	黑色/BK 灰色/GY	5-9	20	15	27	24	24	Φ20.2-Φ20.4	RSKP-M20B-L(N)
M20×1.5		10-15	20	15	28	27.3	27	Φ20.2-Φ20.4	RSKP-M20C-L(N)
M22×1.5		10-15	22	15	28	27.3	27	Φ22.2-Φ22.4	RSKP-M22A-L(N)
M22×1.5	黑色/BK 灰色/GY	7-12	22	15	28	27.3	27	Φ22.2-Φ22.4	RSKP-M22B-L(N)
M22×1.5		6-10	22	15	28	27	27	Φ22.2-Φ22.4	RSKP-M22E-L(N)
M25×1.5		14-18	25	15	31	33.7	33.3	Φ25.2-Φ25.4	RSKP-M25A-L(N)
M25×1.5		11-16	25	15	31	33.7	33.3	Φ25.2-Φ25.4	RSKP-M25B-L(N)
M25×1.5	黑色/BK 灰色/GY	8-13	25	15	31	33	33.3	Φ25.2-Φ25.4	RSKP-M25G-L(N)
M25×1.5		4-6	25	15	31	33	33.3	Φ25.2-Φ25.4	RSKP-M25H-L(N)
M25×1.5		2-4	25	15	31	33	33.3	Φ25.2-Φ25.4	RSKP-M25J-L(N)
M32×1.5	黑色/BK 灰色/GY	18-25	32	15	39	42.6	42.5	Φ32.2-Φ32.4	RSKP-M32A-L(N)
M32×1.5		13-20	32	15	39	42.6	42.5	Φ32.2-Φ32.4	RSKP-M32B-L(N)
M40×1.5		24-32	40	18	44	53	52.7	Φ40.3-Φ40.5	RSKP-M40A-L(N)
M40×1.5	黑色/BK 灰色/GY	20-28	40	18	44	53	52.7	Φ40.3-Φ40.5	RSKP-M40B-L(N)
M40×1.5		22-29	40	18	44	53	52.7	Φ40.3-Φ40.5	RSKP-M40F-L(N)
M50×1.5		32-38	50	18	48	60	59.6	Φ50.3-Φ50.5	RSKP-M50A-L(N)
M50×1.5	黑色/BK 灰色/GY	25-31	50	18	48	60	59.6	Φ50.3-Φ50.5	RSKP-M50B-L(N)
M50×1.5		27.5-33	50	18	48	60	59.6	Φ50.3-Φ50.5	RSKP-M50C-L(N)
M63×1.5	黑色/BK 灰色/GY	37-44	63	18	48	65	67.5	Φ63.3-Φ63.5	RSKP-M63A-L(N)
M63×1.5		29-35	63	18	48	65	67.5	Φ63.3-Φ63.5	RSKP-M63B-L(N)

RSKP-N-PG 尼龙防水接头/Waterproof nylon cable gland



- 塑料材料： PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： O型圈或平垫圈自选，连接更紧密
  改进型护套，保护连接安全

- Material ： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O–ring，IP68
- Temperature Limited：–40℃–100℃，short– term120℃
- Products Feature： Connecting more smoothly &closely with double–thread & O–ring groove. Protecting connection safe by using improved protective sealings



* 特殊规格请垂询
Pre–install Oring or other colors please consult us

型号 Thread Spec.	颜色 Color	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
PG7	黑色/BK 灰色/GY	3-6.5	12.5	8	21	15	15	Φ12.7-Φ13	RSKP-PG7A(N)
PG7		2-5	12.5	8	21	15	15	Φ12.7-Φ13	RSKP-PG7B(N)
PG9		4-8	15.2	8	22	19	19	Φ15.4-Φ15.7	RSKP-PG9A(N)
PG9	黑色/BK 灰色/GY	3-6	15.2	8	22	19	19	Φ15.4-Φ15.7	RSKP-PG9B(N)
PG9		1.5-3	15.2	8	22	19	19	Φ15.4-Φ15.7	RSKP-PG9F(N)
PG11		5-10	18.6	8	25	22	21.7	Φ18.8-Φ19.1	RSKP-PG11A(N)
PG11	黑色/BK 灰色/GY	4-7	18.6	8	25	22	21.7	Φ18.8-Φ19.1	RSKP-PG11B(N)
PG11		4-8	18.6	8	25	22	21.7	Φ18.8-Φ19.1	RSKP-PG11E(N)
PG13.5		6-12	20.4	9	27	24	23.8	Φ20.6-Φ20.9	RSKP-PG13.5A(N)
PG13.5	黑色/BK 灰色/GY	5-9	20.4	9	27	24	23.8	Φ20.6-Φ20.9	RSKP-PG13.5B(N)
PG16		10-15	22.5	10	28	27.3	27	Φ22.7-Φ23	RSKP-PG16A(N)
PG16	黑色/BK 灰色/GY	7-12	22.5	10	28	27.3	27	Φ22.7-Φ23	RSKP-PG16B(N)
PG16		6-10	22.5	10	28	27.3	27	Φ22.7-Φ23	RSKP-PG16E(N)
PG19	黑色/BK 灰色/GY	10-15	23.7	11	28	27	28	Φ23.9-Φ24.1	RSKP-PG19A(N)
PG19	黑色/BK 灰色/GY	7-12	23.7	11	28	27	28	Φ23.9-Φ24.1	RSKP-PG19B(N)
PG21		14-18	28.3	11	31	33.7	33.3	Φ28.5-Φ28.8	RSKP-PG21A(N)
PG21		11-16	28.3	11	31	33.7	33.3	Φ28.5-Φ28.8	RSKP-PG21B(N)
PG21	黑色/BK 灰色/GY	8-13	28.3	11	31	33.7	33.3	Φ28.5-Φ28.8	RSKP-PG21G(N)
PG21		4-6	28.3	11	31	33.7	33.3	Φ28.5-Φ28.8	RSKP-PG21H(N)
PG21		2-4	28.3	11	31	33.7	33.3	Φ28.5-Φ28.8	RSKP-PG21J(N)
PG29	黑色/BK 灰色/GY	18-25	37	11	39	42.6	42.4	Φ37.2-Φ37.5	RSKP-PG29A(N)
PG29		13-20	37	11	39	42.6	42.4	Φ37.2-Φ37.5	RSKP-PG29B(N)
PG36		24-32	47	13	44	53	52.8	Φ47.2-Φ47.5	RSKP-PG36A(N)
PG36	黑色/BK 灰色/GY	20-28	47	13	44	53	52.8	Φ47.2-Φ47.5	RSKP-PG36B(N)
PG36		22-29	47	13	44	53	52.8	Φ47.2-Φ47.5	RSKP-PG36F(N)
PG42		32-38	54	13	48	60.2	59.7	Φ54.2-Φ54.5	RSKP-PG42A(N)
PG42	黑色/BK 灰色/GY	25-31	54	13	48	60.2	59.7	Φ54.2-Φ54.5	RSKP-PG42B(N)
PG42		27.5-33	54	13	48	60.2	59.7	Φ54.2-Φ54.5	RSKP-PG42C(N)
PG48	黑色/BK 灰色/GY	37-44	59.3	14	48	65	64.8	Φ59.5-Φ59.8	RSKP-PG48A(N)
PG48		29-35	59.3	14	48	65	64.8	Φ59.5-Φ59.8	RSKP-PG48B(N)

RSKP-N-PG-L 尼龙防水接头（加长）/Waterproof nylon cable gland（increased length）



- 塑料材料： PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： O型圈或平垫圈自选，连接更紧密
  改进型护套，保护连接安全

- Material ： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O–ring，IP68
- Temperature Limited：–40℃–100℃，short– term120℃
- Products Feature： Connecting more smoothly &closely with double–thread & O–ring groove. Protecting connection safe by using improved protective sealings



* 特殊规格请垂询
Pre–install Oring or other colors please consult us

型号 Thread Spec.	颜色 Color	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
PG7	黑色/BK 灰色/GY	3-6.5	12.5	15	21	15	15	Φ12.7-Φ13	RSKP-PG7A-L(N)
PG7		2-5	12.5	15	21	15	15	Φ12.7-Φ13	RSKP-PG7B-L(N)
PG9		4-8	15.2	15	22	19	19	Φ15.4-Φ15.7	RSKP-PG9A-L(N)
PG9	黑色/BK 灰色/GY	3-6	15.2	15	22	19	19	Φ15.4-Φ15.7	RSKP-PG9B-L(N)
PG9		1.5-3	15.2	15	22	19	19	Φ15.4-Φ15.7	RSKP-PG9F-L(N)
PG11		5-10	18.6	15	25	22	21.7	Φ18.8-Φ19.1	RSKP-PG11A-L(N)
PG11	黑色/BK 灰色/GY	4-7	18.6	15	25	22	21.7	Φ18.8-Φ19.1	RSKP-PG11B-L(N)
PG11		4-8	18.6	15	25	22	21.7	Φ18.8-Φ19.1	RSKP-PG11E-L(N)
PG13.5	黑色/BK 灰色/GY	6-12	20.4	15	27	24	23.8	Φ20.6-Φ20.9	RSKP-PG13.5A-L(N)
PG13.5		5-9	20.4	15	27	24	23.8	Φ20.6-Φ20.9	RSKP-PG13.5B-L(N)
PG16		10-15	22.5	15	28	27.3	27	Φ22.7-Φ23	RSKP-PG16A-L(N)
PG16	黑色/BK 灰色/GY	7-12	22.5	15	28	27.3	27	Φ22.7-Φ23	RSKP-PG16B-L(N)
PG16		6-10	22.5	15	28	27.3	27	Φ22.7-Φ23	RSKP-PG16E-L(N)
PG19	黑色/BK 灰色/GY	10-15	23.7	15	28	27	28	Φ23.9-Φ24.1	RSKP-PG19A-L(N)
PG19		7-12	23.7	15	28	27	28	Φ23.9-Φ24.1	RSKP-PG19B-L(N)
PG21		14-18	28.3	15	31	33.7	33.3	Φ28.5-Φ28.8	RSKP-PG21A-L(N)
PG21		11-16	28.3	15	31	33.7	33.3	Φ28.5-Φ28.8	RSKP-PG21B-L(N)
PG21	黑色/BK 灰色/GY	8-13	28.3	15	31	33.7	33.3	Φ28.5-Φ28.8	RSKP-PG21G-L(N)
PG21		4-6	28.3	15	31	33.7	33.3	Φ28.5-Φ28.8	RSKP-PG21H-L(N)
PG21		2-4	28.3	15	31	33.7	33.3	Φ28.5-Φ28.8	RSKP-PG21J-L(N)
PG29	黑色/BK 灰色/GY	18-25	37	15	39	42.6	42.4	Φ37.2-Φ37.5	RSKP-PG29A-L(N)
PG29		13-20	37	15	39	42.6	42.4	Φ37.2-Φ37.5	RSKP-PG29B-L(N)
PG36		24-32	47	18	44	53	52.8	Φ47.2-Φ47.5	RSKP-PG36A-L(N)
PG36	黑色/BK 灰色/GY	20-28	47	18	44	53	52.8	Φ47.2-Φ47.5	RSKP-PG36B-L(N)
PG36		22-29	47	18	44	53	52.8	Φ47.2-Φ47.5	RSKP-PG36F-L(N)
PG42		32-38	54	18	48	60.2	59.7	Φ54.2-Φ54.5	RSKP-PG42A-L(N)
PG42	黑色/BK 灰色/GY	25-31	54	18	48	60.2	59.7	Φ54.2-Φ54.5	RSKP-PG42B-L(N)
PG42		27.5-33	54	18	48	60.2	59.7	Φ54.2-Φ54.5	RSKP-PG42C-L(N)
PG48	黑色/BK 灰色/GY	37-44	59.3	18	48	65	64.8	Φ59.5-Φ59.8	RSKP-PG48A-L(N)
PG48		29-35	59.3	18	48	65	64.8	Φ59.5-Φ59.8	RSKP-PG48B-L(N)

RSKP-N-NPT 尼龙防水接头/Waterproof nylon cable gland



- 塑料材料： PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： O型圈或平垫圈自选，连接更紧密
  改进型护套，保护连接安全

- Material ： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O–ring，IP68
- Temperature Limited：–40℃–100℃，short– term120℃
- Products Feature： Connecting more smoothly &closely with double–thread & O–ring groove. Protecting connection safe by using improved protective sealings



* 特殊规格请垂询
Pre–install Oring or other colors please consult us

型号 Thread Spec.	颜色 Color	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
NPT1/2"		10-13	21.3	10	28	27.3	26.8	Φ21.5-Φ21.7	RSKP-NPT1/2A(N)
NPT1/2"	黑色/BK 灰色/GY	6-12	21.3	10	28	27.3	26.8	Φ21.5-Φ21.7	RSKP-NPT1/2B(N)
NPT1/2"		9 -13	21.3	10	28	27.3	26.8	Φ21.5-Φ21.7	RSKP-NPT1/2F(N)
NPT3/4"	黑色/BK 灰色/GY	14-18	26.7	11	31	33.7	32.8	Φ26.9-Φ27.1	RSKP-NPT3/4A(N)
NPT3/4"		11-16	26.7	11	31	33.7	32.8	Φ26.9-Φ27.1	RSKP-NPT3/4B(N)
NPT1"	黑色/BK 灰色/GY	18-25	33.4	11	39	42.6	41.5	Φ33.6-Φ33.8	RSKP-NPT1A(N)
NPT1"		13-20	33.4	11	39	42.6	41.5	Φ33.6-Φ33.8	RSKP-NPT1B(N)
NPT1 1/4"	黑色/BK 灰色/GY	24-32	42.1	13	44	53	52.8	Φ42.4-Φ42.6	RSKP-NPT1 1/4A(N)
NPT1 1/4"		20-26	42.1	13	44	53	52.8	Φ42.4-Φ42.6	RSKP-NPT1 1/4B(N)
NPT2"	黑色/BK 灰色/GY	37-44	60.3	14	48	65	67.6	Φ60.6-Φ60.8	RSKP-NPT2A(N)
NPT2"		29-35	60.3	14	48	65	67.6	Φ60.6-Φ60.8	RSKP-NPT2B(N)
NPT2 1/2"	黑色/BK 灰色/GY	51-57	73	16	54	80.8	78.9	Φ73.3-Φ73.5	RSKP-NPT2 1/2A(N)
NPT2 1/2"		43-53	73	16	54	80.8	78.9	Φ73.3-Φ73.5	RSKP-NPT2 1/2B(N)

RSKP-M 尼龙防水接头/Waterproof nylon cable gland



- 塑料材料： PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： O型圈或平垫圈自选，连接更紧密
  改进型护套，保护连接安全

- Material ： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O-ring，IP68
- Temperature Limited：-40℃-100℃，short- term120℃
- Products Feature： Connecting more smoothly &closely with double-thread & O-ring groove. Protecting connection safe by using improved protective sealings



* 特殊规格请垂询
Pre-install Oring or other colors please consult us

型号 Thread Spec.	颜色 Color	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
M12×1.5	黑色/BK 灰色/GY	3-6.5	12	8	21	15	14.8	Φ12.2-Φ12.4	RSKP-M12A
M12×1.5		2-5	12	8	21	15	14.8	Φ12.2-Φ12.4	RSKP-M12B
M16×1.5		4-8	16	8	22	19.2	19	Φ16.2-Φ16.4	RSKP-M16A
M16×1.5	黑色/BK 灰色/GY	2-6	16	8	22	19	19	Φ16.2-Φ16.4	RSKP-M16B
M16×1.5		5-10	16	8	25	22	21.7	Φ16.2-Φ16.4	RSKP-M16C
M18×1.5		5-10	18	8	25	22	22	Φ18.2-Φ18.4	RSKP-M18A
M18×1.5	黑色/BK 灰色/GY	3-7	18	8	25	22	22	Φ18.2-Φ18.4	RSKP-M18B
M20×1.5		6-12	20	9	27	24	23.8	Φ20.2-Φ20.4	RSKP-M20A
M20×1.5	黑色/BK 灰色/GY	5-9	20	9	27	24	23.8	Φ20.2-Φ20.4	RSKP-M20B
M20×1.5		8-14	20	10	28	27.3	27.1	Φ20.2-Φ20.4	RSKP-M20C
M22×1.5		8-14	22	10	28	27.3	27	Φ22.2-Φ22.4	RSKP-M22A
M22×1.5	黑色/BK 灰色/GY	6-12	22	10	28	27.3	27	Φ22.2-Φ22.4	RSKP-M22B
M25×1.5		13-18	25	11	31	33.7	33.3	Φ25.2-Φ25.4	RSKP-M25A
M25×1.5	黑色/BK 灰色/GY	9-16	25	11	31	33.7	33.3	Φ25.2-Φ25.4	RSKP-M25B
M32×1.5		18-25	32	11	39	42.6	42.5	Φ32.2-Φ32.4	RSKP-M32A
M32×1.5	黑色/BK 灰色/GY	13-20	32	11	39	42.6	42.5	Φ32.2-Φ32.4	RSKP-M32B
M32×1.5		15-22	32	11	39	42.6	42.5	Φ32.2-Φ32.4	RSKP-M32C
M40×1.5		22-32	40	13	44	53	52.7	Φ40.3-Φ40.5	RSKP-M40A
M40×1.5	黑色/BK 灰色/GY	20-26	40	13	44	53	52.7	Φ40.3-Φ40.5	RSKP-M40B
M50×1.5		32-38	50	13	48	60.2	59.6	Φ50.3-Φ50.5	RSKP-M50A
M50×1.5	黑色/BK 灰色/GY	25-31	50	13	48	60.2	59.6	Φ50.3-Φ50.5	RSKP-M50B

RSKP-M-L 尼龙防水接头（加长）/Waterproof nylon cable gland（increased length）



- 塑料材料：PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： O型圈或平垫圈自选，连接更紧密
  改进型护套，保护连接安全

- Material ： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O-ring，IP68
- Temperature Limited：-40℃-100℃，short- term120℃
- Products Feature： Connecting more smoothly &closely with double-thread & O-ring groove. Protecting connection safe by using improved protective sealings



* 特殊规格请垂询
Pre-install Oring or other colors please consult us

型号 Thread Spec.	颜色 Color	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
M12×1.5	黑色/BK 灰色/GY	3-6.5	12	15	21	15	14.8	Φ12.2-Φ12.4	RSKP-M12A-L
M12×1.5		2-5	12	15	21	15	14.8	Φ12.2-Φ12.4	RSKP-M12B-L
M16×1.5		4-8	16	15	22	19.2	19	Φ16.2-Φ16.4	RSKP-M16A-L
M16×1.5	黑色/BK 灰色/GY	2-6	16	15	22	19	19	Φ16.2-Φ16.4	RSKP-M16B-L
M16×1.5		5-10	16	15	25	22	22	Φ16.2-Φ16.4	RSKP-M16C-L
M18×1.5		5-10	18	15	25	22	22	Φ18.2-Φ18.4	RSKP-M18A-L
M18×1.5	黑色/BK 灰色/GY	3-7	18	15	25	22	22	Φ18.2-Φ18.4	RSKP-M18B-L
M20×1.5		6-12	20	15	27	24	23.9	Φ20.2-Φ20.4	RSKP-M20A-L
M20×1.5	黑色/BK 灰色/GY	5-9	20	15	27	24	23.9	Φ20.2-Φ20.4	RSKP-M20B-L
M20×1.5		8-14	20	15	28	27.3	27.1	Φ20.2-Φ20.4	RSKP-M20C-L
M22×1.5		8-14	22	15	28	27.3	27	Φ22.2-Φ22.4	RSKP-M22A-L
M22×1.5	黑色/BK 灰色/GY	6-12	22	15	28	27.3	27	Φ22.2-Φ22.4	RSKP-M22B-L
M25×1.5		13-18	25	15	31	33.7	33.3	Φ25.2-Φ25.4	RSKP-M25A-L
M25×1.5	黑色/BK 灰色/GY	9-16	25	15	31	33.7	33.3	Φ25.2-Φ25.4	RSKP-M25B-L
M32×1.5		18-25	32	15	39	42.6	42.5	Φ32.2-Φ32.4	RSKP-M32A-L
M32×1.5	黑色/BK 灰色/GY	13-20	32	15	39	42.6	42.5	Φ32.2-Φ32.4	RSKP-M32B-L
M32×1.5		15-22	32	15	39	42.6	42.5	Φ32.2-Φ32.4	RSKP-M32C-L
M40×1.5		22-32	40	18	44	53	52.7	Φ40.3-Φ40.5	RSKP-M40A-L
M40×1.5	黑色/BK 灰色/GY	20-26	40	18	44	53	52.7	Φ40.3-Φ40.5	RSKP-M40B-L
M50×1.5		32-38	50	18	48	60.2	59.9	Φ50.3-Φ50.5	RSKP-M50A-L
M50×1.5	黑色/BK 灰色/GY	25-31	50	18	48	60.2	59.9	Φ50.3-Φ50.5	RSKP-M50B-L

RSKP-PG 尼龙防水接头/Waterproof nylon cable gland



- 塑料材料：PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： O型圈或平垫圈自选，连接更紧密
  改进型护套，保护连接安全

- Material ： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O-ring，IP68
- Temperature Limited：-40℃-100℃，short- term120℃
- Products Feature： Connecting more smoothly &closely with double-thread & O-ring groove. Protecting connection safe by using improved protective sealings



* 特殊规格请垂询
Pre-install Oring or other colors please consult us

型号 Thread Spec.	颜色 Color	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
PG7	黑色/BK 灰色/GY	3-6.5	12.5	8	21	15.1	14.8	Φ12.7-Φ13	RSKP-PG7A
PG7		2-5	12.5	8	21	15.1	14.8	Φ12.7-Φ13	RSKP-PG7B
PG9	黑色/BK 灰色/GY	4-8	15.2	8	22	19.2	18.9	Φ15.4-Φ15.7	RSKP-PG9A
PG9		2-6	15.2	8	22	19.2	18.9	Φ15.4-Φ15.7	RSKP-PG9B
PG11	黑色/BK 灰色/GY	5-10	18.6	8	25	22	21.7	Φ18.8-Φ19.1	RSKP-PG11A
PG11		3-7	18.6	8	25	22	21.7	Φ18.8-Φ19.1	RSKP-PG11B
PG13.5	黑色/BK 灰色/GY	6-12	20.4	9	27	24	24	Φ20.6-Φ20.9	RSKP-PG13.5A
PG13.5		5-9	20.4	9	27	24	24	Φ20.6-Φ20.9	RSKP-PG13.5B
PG16	黑色/BK 灰色/GY	8-14	22.5	10	28	27.3	27	Φ22.7-Φ23	RSKP-PG16A
PG16		6-12	22.5	10	28	27.3	27	Φ22.7-Φ23	RSKP-PG16B
PG21	黑色/BK 灰色/GY	13-18	28.3	11	31	33.7	33.3	Φ28.5-Φ28.8	RSKP-PG21A
PG21		9-16	28.3	11	31	33.7	33.3	Φ28.5-Φ28.8	RSKP-PG21B
PG29		18-25	37	11	39	42.6	42.4	Φ37.2-Φ37.5	RSKP-PG29A
PG29	黑色/BK 灰色/GY	13-20	37	11	39	42.6	42.4	Φ37.2-Φ37.5	RSKP-PG29B
PG29		15-22	37	11	39	42.6	42.4	Φ37.2-Φ37.5	RSKP-PG29C
PG36	黑色/BK 灰色/GY	22-32	47	13	44	53	52.8	Φ47.2-Φ47.5	RSKP-PG36A
PG36		20-26	47	13	44	53	52.8	Φ47.2-Φ47.5	RSKP-PG36B

RSKP-PG-L 尼龙防水接头（加长）/Waterproof nylon cable gland（increased length）



- 塑料材料：PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： O型圈或平垫圈自选，连接更紧密
  改进型护套，保护连接安全

- Material ： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O-ring，IP68
- Temperature Limited：-40℃-100℃，short- term120℃
- Products Feature： Connecting more smoothly &closely with double-thread & O-ring groove. Protecting connection safe by using improved protective sealings



* 特殊规格请垂询
Pre-install Oring or other colors please consult us

型号 Thread Spec.	颜色 Color	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
PG7	黑色/BK 灰色/GY	3-6.5	12.5	15	21	15.1	14.8	Φ12.7-Φ13	RSKP-PG7A-L
PG7		2-5	12.5	15	21	15.1	14.8	Φ12.7-Φ13	RSKP-PG7B-L
PG9	黑色/BK 灰色/GY	4-8	15.2	15	22	19.2	18.9	Φ15.4-Φ15.7	RSKP-PG9A-L
PG9		2-6	15.2	15	22	19.2	18.9	Φ15.4-Φ15.7	RSKP-PG9B-L
PG11	黑色/BK 灰色/GY	5-10	18.6	15	25	22	21.7	Φ18.8-Φ19.1	RSKP-PG11A-L
PG11		3-7	18.6	15	25	22	21.7	Φ18.8-Φ19.1	RSKP-PG11B-L
PG13.5	黑色/BK 灰色/GY	6-12	20.4	15	27	24	24	Φ20.6-Φ20.9	RSKP-PG13.5A-L
PG13.5		5-9	20.4	15	27	24	24	Φ20.6-Φ20.9	RSKP-PG13.5B-L
PG16	黑色/BK 灰色/GY	8-14	22.5	15	28	27.3	27	Φ22.7-Φ23	RSKP-PG16A-L
PG16		6-12	22.5	15	28	27.3	27	Φ22.7-Φ23	RSKP-PG16B-L
PG21	黑色/BK 灰色/GY	13-18	28.3	15	31	33.7	33.3	Φ28.5-Φ28.8	RSKP-PG21A-L
PG21		9-16	28.3	15	31	33.7	33.3	Φ28.5-Φ28.8	RSKP-PG21B-L
PG29		18-25	37	15	39	42.6	42.4	Φ37.2-Φ37.5	RSKP-PG29A-L
PG29	黑色/BK 灰色/GY	13-20	37	15	39	42.6	42.4	Φ37.2-Φ37.5	RSKP-PG29B-L
PG29		15-22	37	15	39	42.6	42.4	Φ37.2-Φ37.5	RSKP-PG29C-L
PG36	黑色/BK 灰色/GY	22-32	47	18	44	53	52.8	Φ47.2-Φ47.5	RSKP-PG36A-L
PG36		20-26	47	18	44	53	52.8	Φ47.2-Φ47.5	RSKP-PG36B-L

RSKP-M-N×D 多芯尼龙防水接头/Multi-core nylon cable gland



* 特殊规格请垂询
Pre-install Oring or other colors please consult us

- 塑料材料： PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： O型圈或平垫圈自选，连接更紧密
  改进型护套，保护连接安全

- Material ： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O-ring，IP68
- Temperature Limited：-40℃-100℃，short- term120℃
- Products Feature： Connecting more smoothly &closely with double-thread & O-ring groove. Protecting connection safe by using improved protective sealings



型号 Thread Spec.	颜色 Color	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
M12×1.5	黑色/BK 灰色/GY	2*3	12	8	21	15	15	Φ12.2-Φ12.4	RSKP-M12A-2*3
M12×1.5		3*2.7	12	8	21	15	15	Φ12.2-Φ12.4	RSKP-M12A-3*2.7
M16×1.5		2*3	16	8	22	19	19	Φ16.2-Φ16.4	RSKP-M16A-2*3
M16×1.5		2*4	16	8	22	19	19	Φ16.2-Φ16.4	RSKP-N-M16C-2*4
M16×1.5	黑色/BK 灰色/GY	4*2.2	16	8	22	22	19	Φ16.2-Φ16.4	RSKP-M16A-4*2.2
M16×1.5		6*1.5	16	8	25	22	22	Φ16.2-Φ16.4	RSKP-M16C-6*1.5
M18×1.5	黑色/BK 灰色/GY	2*4	18	8	27	22	22	Φ18.2-Φ18.4	RSKP-N-M18A-2*4
M18×1.5		6*1.5	18	8	27	22	22	Φ18.2-Φ18.4	RSKP-M18A-6*1.5
M20×1.5		2*5	20	9	27	24	24	Φ20.2-Φ20.4	RSKP-M20A-2*5
M20×1.5		4*4	20	9	27	24	24	Φ20.2-Φ20.4	RSKP-N-M20A-4*4
M20×1.5		2*6.5	20	10	28	27	27	Φ20.2-Φ20.4	RSKP-M20C-2*6.5
M20×1.5	黑色/BK 灰色/GY	3*4	20	10	28	27	27	Φ20.2-Φ20.4	RSKP-M20C-3*4
M20×1.5		3*5	20	10	28	27	27	Φ20.2-Φ20.4	RSKP-M20C-3*5
M20×1.5		3*5.5	20	10	28	27	27	Φ20.2-Φ20.4	RSKP-M20C-3*5.5
M20×1.5		4*4	20	10	28	27	27	Φ20.2-Φ20.4	RSKP-M20C-4*4
M20×1.5		5*4	20	10	28	27	27	Φ20.2-Φ20.4	RSKP-M20C-5*4
M22×1.5		2*6.5	22	10	28	27	27	Φ22.2-Φ22.4	RSKP-M22A-2*6.5
M22×1.5		3*4	22	10	28	27	27	Φ22.2-Φ22.4	RSKP-M22A-3*4
M22×1.5	黑色/BK 灰色/GY	3*5	22	10	28	27	27	Φ22.2-Φ22.4	RSKP-M22A-3*5
M22×1.5		3*5.5	22	10	28	27	27	Φ22.2-Φ22.4	RSKP-M22A-3*5.5
M22×1.5		4*4	22	10	28	27	27	Φ22.2-Φ22.4	RSKP-M22A-4*4
M22×1.5		5*4	22	10	28	27	27	Φ22.2-Φ22.4	RSKP-M22A-5*4
M25×1.5		2*4	25	11	31	33	33	Φ25.2-Φ25.4	RSKP-M25A-2*4
M25×1.5		2*6	25	11	31	33	33	Φ25.2-Φ25.4	RSKP-M25A-2*6.1
M25×1.5		2*9	25	11	31	33	33	Φ25.2-Φ25.4	RSKP-M25A-2*9
M25×1.5		2*9+2*5	25	11	31	33	33	Φ25.2-Φ25.4	RSKP-M25A-2*9+2*5
M25×1.5	黑色/BK 灰色/GY	3*6	25	11	31	33	33	Φ25.2-Φ25.4	RSKP-M25A-3*6
M25×1.5		3*8	25	11	31	33	33	Φ25.2-Φ25.4	RSKP-M25A-3*8
M25×1.5		4*6.5	25	11	31	33	33	Φ25.2-Φ25.4	RSKP-M25A-4*6.5
M25×1.5		4*8	25	11	31	33	33	Φ25.2-Φ25.4	RSKP-M25A-4*8
M25×1.5		5*6	25	11	31	33	33	Φ25.2-Φ25.4	RSKP-M25A-5*6
M25×1.5		6*4	25	11	31	33	33	Φ25.2-Φ25.4	RSKP-M25A-6*4
M32×1.5		2*10	32	11	39	42	42	Φ32.2-Φ32.4	RSKP-M32A-2*10
M32×1.5		3*6.4	32	11	39	42	42	Φ32.2-Φ32.4	RSKP-M32A-3*6.4
M32×1.5		4*9	32	11	39	42	42	Φ32.2-Φ32.4	RSKP-M32A-4*9
M32×1.5	黑色/BK 灰色/GY	5*8	32	11	39	42	42	Φ32.2-Φ32.4	RSKP-M32A-5*8
M32×1.5		6*6	32	11	39	42	42	Φ32.2-Φ32.4	RSKP-M32A-6*6
M32×1.5		3*10	32	11	39	42	42	Φ32.2-Φ32.4	RSKP-M32A-3*10
M32×1.5		2*11	32	11	39	42	42	Φ32.2-Φ32.4	RSKP-M32A-2*11
M40×1.5		3*10	40	13	44	53	53	Φ40.3-Φ40.5	RSKP-M40A-3*10
M40×1.5	黑色/BK 灰色/GY	4*11	40	13	44	53	53	Φ40.3-Φ40.5	RSKP-M40A-4*11
M40×1.5		5*9	40	13	44	53	53	Φ40.3-Φ40.5	RSKP-M40A-5*9

RSKP-PG-N×D 多芯尼龙防水接头/Multi-core nylon cable gland



* 特殊规格请垂询
Pre-install Oring or other colors please consult us

- 塑料材料： PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： O型圈或平垫圈自选，连接更紧密
  改进型护套，保护连接安全

- Material ： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O-ring，IP68
- Temperature Limited：-40℃-100℃，short- term120℃
- Products Feature： Connecting more smoothly &closely with double-thread & O-ring groove. Protecting connection safe by using improved protective sealings



型号 Thread Spec.	颜色 Color	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
PG7	黑色/BK 灰色/GY	2*3	12.5	8	21	15	15	Φ12.7-Φ13	RSKP-PG7A-2*3
PG7		3*2.7	12.5	8	21	15	15	Φ12.7-Φ13	RSKP-PG7A-3*2.7
PG9	黑色/BK 灰色/GY	2*3	15.2	8	22	19	19	Φ15.4-Φ15.7	RSKP-PG9A-2*3
PG9		4*2.2	15.2	8	22	19	19	Φ15.4-Φ15.7	RSKP-PG9A-4*2.2
PG11	黑色/BK 灰色/GY	6*1.5	18.6	8	25	22	22	Φ18.8-Φ19.1	RSKP-PG11A-6*1.5
PG11		2*4	18.6	8	25	22	22	Φ18.8-Φ19.1	RSKP-N-PG11A-2*4
PG13.5	黑色/BK 灰色/GY	2*5	20.4	9	27	24	24	Φ20.6-Φ20.9	RSKP-PG13.5A-2*5
PG13.5		4*4	20.4	9	27	24	24	Φ20.6-Φ20.9	RSKP-N-PG13.5A-4*4
PG16		2*6.5	22.5	10	28	27	27	Φ22.7-Φ23	RSKP-PG16A-2*6.5
PG16		3*4	22.5	10	28	27	27	Φ22.7-Φ23	RSKP-PG16A-3*4
PG16	黑色/BK 灰色/GY	3*5	22.5	10	28	27	27	Φ22.7-Φ23	RSKP-PG16A-3*5
PG16		3*5.5	22.5	10	28	27	27	Φ22.7-Φ23	RSKP-PG16A-3*5.5
PG16		4*4	22.5	10	28	27	27	Φ22.7-Φ23	RSKP-PG16A-4*4
PG16		5*4	22.5	10	28	27	27	Φ22.7-Φ23	RSKP-PG16A-5*4
PG21		2*6.1	28.3	11	31	33	33	Φ28.5-Φ28.8	RSKP-PG21A-2*6.1
PG21		2*9	28.3	11	31	33	33	Φ28.5-Φ28.8	RSKP-PG21A-2*9
PG21		3*6	28.3	11	31	33	33	Φ28.5-Φ28.8	RSKP-PG21A-3*6
PG21		3*8	28.3	11	31	33	33	Φ28.5-Φ28.8	RSKP-PG21A-3*8
PG21	黑色/BK 灰色/GY	4*6	28.3	11	31	33	33	Φ28.5-Φ28.8	RSKP-PG21A-4*6
PG21		4*8	28.3	11	31	33	33	Φ28.5-Φ28.8	RSKP-PG21A-4*8
PG21		5*6	28.3	11	31	33	33	Φ28.5-Φ28.8	RSKP-PG21A-5*6
PG21		6*4	28.3	11	31	33	33	Φ28.5-Φ28.8	RSKP-PG21A-6*4
PG21		2*9+2*5	28.3	11	31	33	33	Φ28.5-Φ28.8	RSKP-PG21A-2*9+2*5
PG29		2*10	37	11	39	42	42	Φ37.2-Φ37.5	RSKP-PG29A-2*10
PG29		3*6.4	37	11	39	42	42	Φ37.2-Φ37.5	RSKP-PG29A-3*6.4
PG29		4*9	37	11	39	42	42	Φ37.2-Φ37.5	RSKP-PG29A-4*9
PG29	黑色/BK 灰色/GY	5*8	37	11	39	42	42	Φ37.2-Φ37.5	RSKP-PG29A-5*8
PG29		6*6	37	11	39	42	42	Φ37.2-Φ37.5	RSKP-PG29A-6*6
PG29		3*10	37	11	39	42	42	Φ37.2-Φ37.5	RSKP-PG29A-3*10
PG29		2*11	37	11	39	42	42	Φ37.2-Φ37.5	RSKP-PG29A-2*11
PG36		3*10	47	13	44	53	53	Φ47.2-Φ47.5	RSKP-PG36A-3*10
PG36	黑色/BK 灰色/GY	4*11	47	13	44	53	53	Φ47.2-Φ47.5	RSKP-PG36A-4*11
PG36		5*9	47	13	44	53	53	Φ47.2-Φ47.5	RSKP-PG36A-5*9

RSKP-M-Ex 防爆尼龙防水接头//Explosion-proof nylon cable gland



* 特殊规格请垂询
Pre–install Oring or other colors please consult us

- 塑料材料： PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： O型圈或平垫圈自选，连接更紧密
  改进型护套，保护连接安全

- Material ： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O–ring，IP68
- Temperature Limited：–40℃–100℃，short– term120℃
- Products Feature： Connecting more smoothly &closely with double–thread & O–ring groove. Protecting connection safe by using improved protective sealings



型号 Thread Spec.	颜色 Color	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
M12×1.5	黑色/BK 灰色/GY	3-6.5	12	8	21	15	15	Φ12.2-Φ12.4	RSKP-M12A-Ex
M12×1.5		2-5	12	8	21	15	15	Φ12.2-Φ12.4	RSKP-M12B-Ex
M16×1.5		4-8	16	8	22	19	19	Φ16.2-Φ16.4	RSKP-M16A-Ex
M16×1.5	黑色/BK 灰色/GY	2-6	16	8	22	19	19	Φ16.2-Φ16.4	RSKP-M16B-Ex
M16×1.5		5-10	16	8	25	22	22	Φ16.2-Φ16.4	RSKP-M16C-Ex
M18×1.5	黑色/BK 灰色/GY	5-10	18	8	25	22	22	Φ18.2-Φ18.4	RSKP-M18A-Ex
M18×1.5		3-7	18	8	25	22	22	Φ18.2-Φ18.4	RSKP-M18B-Ex
M20×1.5		6-12	20	9	27	24	24	Φ20.2-Φ20.4	RSKP-M20A-Ex
M20×1.5	黑色/BK 灰色/GY	5-9	20	9	27	24	24	Φ20.2-Φ20.4	RSKP-M20B-Ex
M20×1.5		8-14	20	10	28	27	27	Φ20.2-Φ20.4	RSKP-M20C-Ex
M22×1.5	黑色/BK 灰色/GY	8-14	22	10	28	27	27	Φ22.2-Φ22.4	RSKP-M22A-Ex
M22×1.5		6-12	22	10	28	27	27	Φ22.2-Φ22.4	RSKP-M22B-Ex
M25×1.5	黑色/BK 灰色/GY	13-18	25	11	31	33	33	Φ25.2-Φ25.4	RSKP-M25A-Ex
M25×1.5		9-16	25	11	31	33	33	Φ25.2-Φ25.4	RSKP-M25B-Ex
M32×1.5		18-25	32	11	39	42	42	Φ32.2-Φ32.4	RSKP-M32A-Ex
M32×1.5	黑色/BK 灰色/GY	13-20	32	11	39	42	42	Φ32.2-Φ32.4	RSKP-M32B-Ex
M32×1.5		15-22	32	11	39	42	42	Φ32.2-Φ32.4	RSKP-M32C-Ex
M40×1.5	黑色/BK 灰色/GY	22-32	40	13	44	53	53	Φ40.3-Φ40.5	RSKP-M40A-Ex
M40×1.5		20-26	40	13	44	53	53	Φ40.3-Φ40.5	RSKP-M40B-Ex
M50×1.5	黑色/BK 灰色/GY	32-38	50	15	48	60	60	Φ50.3-Φ50.5	RSKP-M50A-Ex
M50×1.5		25-31	50	15	48	60	60	Φ50.3-Φ50.5	RSKP-M50B-Ex
M63×1.5	黑色/BK 灰色/GY	37-44	63	15	48	65	68	Φ63.3-Φ63.5	RSKP-M63A-Ex
M63×1.5		29-35	63	15	48	65	68	Φ63.3-Φ63.5	RSKP-M63B-Ex
M72×2.0	黑色/BK 灰色/GY	51-57	72	16	54	80	85	Φ72.3-Φ72.5	RSKP-M72A-Ex
M72×2.0		43-53	72	16	54	80	85	Φ72.3-Φ72.5	RSKP-M72B-Ex

RSKP-M-Ex-L 防爆尼龙防水接头（加长）/Explosion-proof cable gland（increased length）



* 特殊规格请垂询
Pre–install Oring or other colors please consult us

- 塑料材料： PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： O型圈或平垫圈自选，连接更紧密
  改进型护套，保护连接安全

- Material ： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O–ring，IP68
- Temperature Limited：–40℃–100℃，short– term120℃
- Products Feature： Connecting more smoothly &closely with double–thread & O–ring groove. Protecting connection safe by using improved protective sealings



型号 Thread Spec.	颜色 Color	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
M12×1.5	黑色/BK 灰色/GY	3-6.5	12	15	21	15	15	Φ12.2-Φ12.4	RSKP-M12A-Ex-L
M12×1.5		2-5	12	15	21	15	15	Φ12.2-Φ12.4	RSKP-M12B-Ex-L
M16×1.5		4-8	16	15	22	19	19	Φ16.2-Φ16.4	RSKP-M16A-Ex-L
M16×1.5	黑色/BK 灰色/GY	2-6	16	15	22	19	19	Φ16.2-Φ16.4	RSKP-M16B-Ex-L
M16×1.5		5-10	16	15	25	22	22	Φ16.2-Φ16.4	RSKP-M16C-Ex-L
M18×1.5	黑色/BK 灰色/GY	5-10	18	15	25	22	22	Φ18.2-Φ18.4	RSKP-M18A-Ex-L
M18×1.5		3-7	18	15	25	22	22	Φ18.2-Φ18.4	RSKP-M18B-Ex-L
M20×1.5		6-12	20	15	27	24	24	Φ20.2-Φ20.4	RSKP-M20A-Ex-L
M20×1.5	黑色/BK 灰色/GY	5-9	20	15	27	24	24	Φ20.2-Φ20.4	RSKP-M20B-Ex-L
M20×1.5		8-14	20	15	28	27	27	Φ20.2-Φ20.4	RSKP-M20C-Ex-L
M22×1.5	黑色/BK 灰色/GY	8-14	22	15	28	27	27	Φ22.2-Φ22.4	RSKP-M22A-Ex-L
M22×1.5		6-12	22	15	28	27	27	Φ22.2-Φ22.4	RSKP-M22B-Ex-L
M25×1.5	黑色/BK 灰色/GY	13-18	25	15	31	33	33	Φ25.2-Φ25.4	RSKP-M25A-Ex-L
M25×1.5		9-16	25	15	31	33	33	Φ25.2-Φ25.4	RSKP-M25B-Ex-L
M32×1.5		18-25	32	15	39	42	42	Φ32.2-Φ32.4	RSKP-M32A-Ex-L
M32×1.5	黑色/BK 灰色/GY	13-20	32	15	39	42	42	Φ32.2-Φ32.4	RSKP-M32B-Ex-L
M32×1.5		15-22	32	15	39	42	42	Φ32.2-Φ32.4	RSKP-M32C-Ex-L
M40×1.5	黑色/BK 灰色/GY	22-32	40	18	44	53	53	Φ40.3-Φ40.5	RSKP-M40A-Ex-L
M40×1.5		20-26	40	18	44	53	53	Φ40.3-Φ40.5	RSKP-M40B-Ex-L
M50×1.5	黑色/BK 灰色/GY	32-38	50	18	48	60	60	Φ50.3-Φ50.5	RSKP-M50A-Ex-L
M50×1.5		25-31	50	18	48	60	60	Φ50.3-Φ50.5	RSKP-M50B-Ex-L
M63×1.5	黑色/BK 灰色/GY	37-44	63	18	48	65	68	Φ63.3-Φ63.5	RSKP-M63A-Ex-L
M63×1.5		29-35	63	18	48	65	68	Φ63.3-Φ63.5	RSKP-M63B-Ex-L

RSKP-PG-Ex 防爆尼龙防水接头/Explosion-proof nylon cable gland



- 塑料材料： PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： O型圈或平垫圈自选，连接更紧密
  改进型护套，保护连接安全

- Material ： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O-ring，IP68
- Temperature Limited：-40℃-100℃，short- term120℃
- Products Feature： Connecting more smoothly &closely with double-thread & O-ring groove. Protecting connection safe by using improved protective sealings



* 特殊规格请垂询
Pre-install Oring or other colors please consult us

型号 Thread Spec.	颜色 Color	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
PG7	黑色/BK 灰色/GY	3-6.5	12.5	8	21	15	15	Φ12.7-Φ13	RSKP-PG7A-Ex
PG7		2-5	12.5	8	21	15	15	Φ12.7-Φ13	RSKP-PG7B-Ex
PG9	黑色/BK 灰色/GY	4-8	15.2	8	22	19	19	Φ15.4-Φ15.7	RSKP-PG9A-Ex
PG9		2-6	15.2	8	22	19	19	Φ15.4-Φ15.7	RSKP-PG9B-Ex
PG11	黑色/BK 灰色/GY	5-10	18.6	8	25	22	22	Φ18.8-Φ19.1	RSKP-PG11A-Ex
PG11		3-7	18.6	8	25	22	22	Φ18.8-Φ19.1	RSKP-PG11B-Ex
PG13.5	黑色/BK 灰色/GY	6-12	20.4	9	27	24	24	Φ20.6-Φ20.9	RSKP-PG13.5A-Ex
PG13.5		5-9	20.4	9	27	24	24	Φ20.6-Φ20.9	RSKP-PG13.5B-Ex
PG16	黑色/BK 灰色/GY	8-14	22.5	10	28	27	27	Φ22.7-Φ23	RSKP-PG16A-Ex
PG16		6-12	22.5	10	28	27	27	Φ22.7-Φ23	RSKP-PG16B-Ex
PG21	黑色/BK 灰色/GY	13-18	28.3	11	31	33	33	Φ28.5-Φ28.8	RSKP-PG21A-Ex
PG21		9-16	28.3	11	31	33	33	Φ28.5-Φ28.8	RSKP-PG21B-Ex
PG29		18-25	37	11	39	42	42	Φ37.2-Φ37.5	RSKP-PG29A-Ex
PG29	黑色/BK 灰色/GY	13-20	37	11	39	42	42	Φ37.2-Φ37.5	RSKP-PG29B-Ex
PG29		15-22	37	11	39	42	42	Φ37.2-Φ37.5	RSKP-PG29C-Ex
PG36	黑色/BK 灰色/GY	22-32	47	13	44	53	53	Φ47.2-Φ47.5	RSKP-PG36A-Ex
PG36		20-26	47	13	44	53	53	Φ47.2-Φ47.5	RSKP-PG36B-Ex
PG42	黑色/BK 灰色/GY	32-38	54	13	48	60	60	Φ54.2-Φ54.5	RSKP-PG42A-Ex
PG42		25-31	54	13	48	60	60	Φ54.2-Φ54.5	RSKP-PG42B-Ex
PG48	黑色/BK 灰色/GY	37-44	59.3	14	48	65	65	Φ59.5-Φ59.8	RSKP-PG48A-Ex
PG48		29-35	59.3	14	48	65	65	Φ59.5-Φ59.8	RSKP-PG48B-Ex

RSKP-PG-Ex-L 防爆尼龙防水接头（加长）/Explosion-proof cable gland（increased length）



- 塑料材料： PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： O型圈或平垫圈自选，连接更紧密
  改进型护套，保护连接安全

- Material ： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O-ring，IP68
- Temperature Limited：-40℃-100℃，short- term120℃
- Products Feature： Connecting more smoothly &closely with double-thread & O-ring groove. Protecting connection safe by using improved protective sealings



* 特殊规格请垂询
Pre-install Oring or other colors please consult us

型号 Thread Spec.	颜色 Color	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
PG7	黑色/BK 灰色/GY	3-6.5	12.5	15	21	15	15	Φ12.7-Φ13	RSKP-PG7A-Ex-L
PG7		2-5	12.5	15	21	15	15	Φ12.7-Φ13	RSKP-PG7B-Ex-L
PG9	黑色/BK 灰色/GY	4-8	15.2	15	22	19	19	Φ15.4-Φ15.7	RSKP-PG9A-Ex-L
PG9		2-6	15.2	15	22	19	19	Φ15.4-Φ15.7	RSKP-PG9B-Ex-L
PG11	黑色/BK 灰色/GY	5-10	18.6	15	25	22	22	Φ18.8-Φ19.1	RSKP-PG11A-Ex-L
PG11		3-7	18.6	15	25	22	22	Φ18.8-Φ19.1	RSKP-PG11B-Ex-L
PG13.5	黑色/BK 灰色/GY	6-12	20.4	15	27	24	24	Φ20.6-Φ20.9	RSKP-PG13.5A-Ex-L
PG13.5		5-9	20.4	15	27	24	24	Φ20.6-Φ20.9	RSKP-PG13.5B-Ex-L
PG16	黑色/BK 灰色/GY	8-14	22.5	15	28	27	27	Φ22.7-Φ23	RSKP-PG16A-Ex-L
PG16		6-12	22.5	15	28	27	27	Φ22.7-Φ23	RSKP-PG16B-Ex-L
PG21	黑色/BK 灰色/GY	13-18	28.3	15	31	33	33	Φ28.5-Φ28.8	RSKP-PG21A-Ex-L
PG21		9-16	28.3	15	31	33	33	Φ28.5-Φ28.8	RSKP-PG21B-Ex-L
PG29		18-25	37	15	39	42	42	Φ37.2-Φ37.5	RSKP-PG29A-Ex-L
PG29	黑色/BK 灰色/GY	13-20	37	15	39	42	42	Φ37.2-Φ37.5	RSKP-PG29B-Ex-L
PG29		15-22	37	15	39	42	42	Φ37.2-Φ37.5	RSKP-PG29C-Ex-L
PG36	黑色/BK 灰色/GY	22-32	47	18	44	53	53	Φ47.2-Φ47.5	RSKP-PG36A-Ex-L
PG36		20-26	47	18	44	53	53	Φ47.2-Φ47.5	RSKP-PG36B-Ex-L
PG42	黑色/BK 灰色/GY	32-38	54	18	48	60	60	Φ54.2-Φ54.5	RSKP-PG42A-Ex-L
PG42		25-31	54	18	48	60	60	Φ54.2-Φ54.5	RSKP-PG42B-Ex-L
PG48	黑色/BK 灰色/GY	37-44	59.3	18	48	65	65	Φ59.5-Φ59.8	RSKP-PG48A-Ex-L
PG48		29-35	59.3	18	48	65	65	Φ59.5-Φ59.8	RSKP-PG48B-Ex-L

RSKP-M...D 多衬套尼龙防水接头/Multilayer series waterproof nylon cable gland



- 塑料材料： PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： O型圈或平垫圈自选，连接更紧密
  改进型护套，保护连接安全

- Material： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O-ring，IP68
- Temperature Limited：-40℃-100℃，short- term120℃
- Products Feature： Connecting more smoothly &closely with double-thread & O-ring groove. Protecting connection safe by using improved protective sealings



* 特殊规格请垂询
Pre-install Oring or other colors please consult us

型号 Thread Spec.	颜色 Color	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
M16x1.5	黑色/BK 灰色/GY	4-8 2-3	16	8	25	22	22	Φ16.2-Φ16.4	RSKP-M16D1
M18*1.5	黑色/BK 灰色/GY	4-8 2-3	18	8	25	22	22	Φ18.2-Φ18.4	RSKP-M18D
M20×1.5	黑色/BK 灰色/GY	9-15 4-9	25	11	31	33	33	Φ20.2-Φ20.4	RSKP-M20D
M25×1.5	黑色/BK 灰色/GY	13-18 10-13	25	11	31	33	33	Φ25.2-Φ25.4	RSKP-M25D
M32×1.5	黑色/BK 灰色/GY	18-25 13-18 9-13	32	11	39	42	42	Φ32.2-Φ32.4	RSKP-M32D1
M32×1.5	黑色/BK 灰色/GY	18-25 14-18	32	11	39	42	42	Φ32.2-Φ32.4	RSKP-M32D
M40×1.5	黑色/BK 灰色/GY	26-32 22-26 19-22	40	13	44	53	53	Φ40.3-Φ40.5	RSKP-M40D
M50×1.5	黑色/BK 灰色/GY	32-38 25.5-32 21.5-25.5	50	15	48	60	60	Φ50.3-Φ50.5	RSKP-M50D
M63×1.5	黑色/BK 灰色/GY	37-44 30-37 24-30 20-24	63	15	48	65	68	Φ63.3-Φ63.5	RSKP-M63D
M72×2.0	黑色/BK 灰色/GY	51-57 43-50 36-43 30-36 26-30	72	16	54	80	85	Φ72.3-Φ72.5	RSKP-M72D
M90×2.0	黑色/BK 灰色/GY	72-77 65-72 57-65 45-57 33-45	90	25	58	109	109	Φ90.3-Φ90.5	RSKP-M90D

RSKP-PG...D 多衬套尼龙防水接头/Multilayer series waterproof nylon cable gland



- 塑料材料： PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： O型圈或平垫圈自选，连接更紧密
  改进型护套，保护连接安全

- Material： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O-ring，IP68
- Temperature Limited：-40℃-100℃，short- term120℃
- Products Feature： Connecting more smoothly & closely with double-thread & O-ring groove. Protecting connection safe by using improved protective sealings



* 特殊规格请垂询
Pre-install Oring or other colors please consult us

型号 Thread Spec.	颜色 Color	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
PG9	黑色/BK 灰色/GY	4-8 2-3	15.2	8	22	19	19	Φ15.4-Φ15.7	RSKP-PG9D1
PG11	黑色/BK 灰色/GY	4-8 2-3	18.6	8	25	22	22	Φ18.8-Φ19.1	RSKP-PG11D
PG16	黑色/BK 灰色/GY	9-15 4-9	20.4	9	27	24	24	Φ20.6-Φ20.9	RSKP-PG16D
PG21	黑色/BK 灰色/GY	13-18 10-13	28.3	11	31	33	33	Φ28.5-Φ28.8	RSKP-PG21D
PG29	黑色/BK 灰色/GY	18-25 13-18 9-13	37	11	39	42	42	Φ37.2-Φ37.5	RSKP-PG29D1
PG29	黑色/BK 灰色/GY	18-25 14-18	37	11	39	42	42	Φ37.2-Φ37.5	RSKP-PG29D
PG36	黑色/BK 灰色/GY	26-32 22-26 19-22	47	13	44	53	53	Φ47.2-Φ47.5	RSKP-PG36D
PG42	黑色/BK 灰色/GY	32-38 25.5-32 21.5-25.5	54	13	48	60	60	Φ54.2-Φ54.5	RSKP-PG42D
PG48	黑色/BK 灰色/GY	40-50 30-40 20-30	59.3	14	52	70	70	Φ59.5-Φ59.8	RSKP-PG48D1
PG48	黑色/BK 灰色/GY	37-44 30-37 24-30 20-24	59.3	14	48	65	65	Φ59.5-Φ59.8	RSKP-PG48D

RSKP-M/PG...D-L 多衬套尼龙防水接头（加长）/Multilayer Waterproof Nylon Cable Gland



- 塑料材料： PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： O型圈或平垫圈自选，连接更紧密
  改进型护套，保护连接安全

- Material： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O-ring，IP68
- Temperature Limited：-40℃-100℃，short- term120℃
- Products Feature： Connecting more smoothly & closely with double-thread & O-ring groove. Protecting connection safe by using improved protective sealings



* 特殊规格请垂询
Pre-install Oring or other colors please consult us

型号 Thread Spec.	颜色 Color	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
M16x1.5	黑色/BK 灰色/GY	4-8	16	15	25	22	22	Φ16.2-Φ16.4	RSKP-M16D1-L
	黑色/BK 灰色/GY	2-3							
M18*1.5	黑色/BK 灰色/GY	4-8	18	15	25	22	22	Φ18.2-Φ18.4	RSKP-M18D-L
	黑色/BK 灰色/GY	2-3							
M20*1.5	黑色/BK 灰色/GY	9-15	25	15	31	33	33	Φ20.2-Φ20.4	RSKP-M20D-L
	黑色/BK 灰色/GY	4-9							
M25×1.5	黑色/BK 灰色/GY	14-18	25	15	31	33	33	Φ25.2-Φ25.4	RSKP-M25D-L
	黑色/BK 灰色/GY	10-14							
M32×1.5	黑色/BK 灰色/GY	18-25	32	15	39	42	42	Φ32.2-Φ32.4	RSKP-M32D-L
	黑色/BK 灰色/GY	14-18							
M40×1.5	黑色/BK 灰色/GY	26-32	40	18	44	53	53	Φ40.3-Φ40.5	RSKP-M40D-L
	黑色/BK 灰色/GY	22-26							
	黑色/BK 灰色/GY	19-22							
M50×1.5	黑色/BK 灰色/GY	32-38	50	18	48	60	60	Φ50.3-Φ50.5	RSKP-M50D-L
	黑色/BK 灰色/GY	25.5-32							
	黑色/BK 灰色/GY	21.5-25.5							
M63×1.5	黑色/BK 灰色/GY	37-44	63	18	48	65	68	Φ63.3-Φ63.5	RSKP-M63D-L
	黑色/BK 灰色/GY	30-37							
	黑色/BK 灰色/GY	24-30							
	黑色/BK 灰色/GY	20-24							

型号 Thread Spec.	颜色 Color	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
PG9	黑色/BK 灰色/GY	4-8	15.2	8	22	19	19	Φ15.4-Φ15.7	RSKP-PG9D1-L
	黑色/BK 灰色/GY	2-3							
PG11	黑色/BK 灰色/GY	4-8	18.6	8	25	22	22	Φ18.8-Φ19.1	RSKP-PG11D-L
	黑色/BK 灰色/GY	2-3							
PG13.5	黑色/BK 灰色/GY	9-15	20.4	9	27	24	24	Φ20.6-Φ20.9	RSKP-PG13.5D-L
	黑色/BK 灰色/GY	4-9							
PG21	黑色/BK 灰色/GY	13-18	28.3	15	31	33	33	Φ28.5-Φ28.8	RSKP-PG21D-L
	黑色/BK 灰色/GY	10-13							
PG29	黑色/BK 灰色/GY	18-25	37	15	39	42	42	Φ37.2-Φ37.5	RSKP-PG29D-L
	黑色/BK 灰色/GY	14-18							
PG36	黑色/BK 灰色/GY	26-32	47	18	44	53	53	Φ47.2-Φ47.5	RSKP-PG36D-L
	黑色/BK 灰色/GY	22-26							
	黑色/BK 灰色/GY	19-22							
PG42	黑色/BK 灰色/GY	32-38	54	18	48	60	60	Φ54.2-Φ54.5	RSKP-PG42D-L
	黑色/BK 灰色/GY	25.5-32							
	黑色/BK 灰色/GY	21.5-25.5							
PG48	黑色/BK 灰色/GY	40-50	59.38	18	48	65	65	Φ59.5-Φ59.8	RSKP-PG48D-L
	黑色/BK 灰色/GY	30-40							
	黑色/BK 灰色/GY	20-30							
	黑色/BK 灰色/GY	37-44							

RSKP-NPT...D 多衬套尼龙防水接头/Multilayer Waterproof Nylon Cable Gland



- 塑料材料： PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： O型圈或平垫圈自选，连接更紧密
  改进型护套，保护连接安全

- Material： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O-ring，IP68
- Temperature Limited：-40℃-100℃，short- term120℃
- Products Feature： Connecting more smoothly & closely with double-thread & O-ring groove. Protecting connection safe by using improved protective sealings



* 特殊规格请垂询
Pre-install Oring or other colors please consult us

型号 Thread Spec.	颜色 Color	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
NPT3/4"	黑色/BK 灰色/GY	14-18	26.7	11	31	33	33	Φ26.9-Φ27.1	RSKP-NPT3/4D
	黑色/BK 灰色/GY	10-14							
NPT1"	黑色/BK 灰色/GY	18-25	33.4	11	39	42	42	Φ33.6-Φ33.8	RSKP-NPT1D
	黑色/BK 灰色/GY	14-18							
NPT1 1/4"	黑色/BK 灰色/GY	26-32	42.2	13	44	53	53	Φ42.4-Φ42.6	RSKP-NPT1 1/4D
	黑色/BK 灰色/GY	22-26							
	黑色/BK 灰色/GY	19-22							
NPT2"	黑色/BK 灰色/GY	37-44	60.3	14	48	65	68	Φ60.6-Φ60.8	RSKP-NPT2D
	黑色/BK 灰色/GY	30-37							
	黑色/BK 灰色/GY	24-30							
	黑色/BK 灰色/GY	20-24							
NPT2 1/2"	黑色/BK 灰色/GY	51-57	73	16	54	80	80	Φ73.3-Φ73.5	RSKP-NPT2 1/2D
	黑色/BK 灰色/GY	43-50							
	黑色/BK 灰色/GY	36-43							
	黑色/BK 灰色/GY	30-36							
	黑色/BK 灰色/GY	26-30							

RSKP-MXXD-N×Q 多芯多衬套尼龙防水接头/Multi-core&Multilayer Cable Gland



- 塑料材料： PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： O型圈或平垫圈自选，连接更紧密
  改进型护套，保护连接安全

- Material： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O-ring，IP68
- Temperature Limited：-40℃-100℃，short- term120℃
- Products Feature： Connecting more smoothly & closely with double-thread & O-ring groove. Protecting connection safe by using improved protective sealings



* 特殊规格请垂询
Pre-install Oring or other colors please consult us

型号 Thread Spec.	颜色 Color	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
		28-31							
M90×2.0	黑色/BK 灰色/GY	25-28	90	25	58	109	109	Φ90.3-Φ90.5	RSKP-M90D-3x31
		22-25							
		25-28							
M90×2.0	黑色/BK 灰色/GY	22-25	90	25	58	109	109	Φ90.3-Φ90.5	RSKP-M90D-4x28
		19-22							

RSFP 法兰式尼龙防水接头/Flanged nylon waterproof joint



* 特殊规格请垂询
Pre–install Oring or other colors please consult us

- 塑料材料： PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： 主体和法兰底座是可以拆分的，用螺钉连接更紧密可靠改进型护套，保护连接安全

- Material： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O–ring，IP68
- Temperature Limited：–40℃–100℃，short– term120℃
- Products Feature： The main body and the flange base can be separated, and using the screw connection is tighter and more reliable. Protecting connection safe by using improved protective sealings



型号 Thread Spec.	颜色 Color	孔数×孔径 (Φ)mm	安装孔距 Mounting hole distance (L1)mm	(L2)mm	组合高度 combined altitudes (H)mm	螺帽扳手尺寸 Spanner (SW)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
RSFP-2×5.5	黑色/BK 灰色/GY	2×5.5	53	28	59	27	53×28(4-Φ5)	RSFP-53×28A-2×5.5
RSFP-1×7+1×5.5	黑色/BK 灰色/GY	1×7+1×5.5	53	28	59	27	53×28(4-Φ5)	RSFP-53×28A-1×7+1×5.5
RSFP-2×7	黑色/BK 灰色/GY	2×7	53	28	59	27	53×28(4-Φ5)	RSFP-53×28A-2×7

RSFP 法兰式尼龙防水接头/Flanged nylon waterproof joint



* 特殊规格请垂询
Pre–install Oring or other colors please consult us

- 符合RoHS标准:
- 阻燃等级:尼龙材质:UL94 V-0;
  橡胶材质:UL94 V-HB;
- 防护等级：IPX6;
- 温度范围：-40℃-105℃;
- 单孔卡线规格:4 -11mm;

- Flame Retardant grade: Nylon material :UL94 V–0;
  Rubber material :UL94 V–HB;
- Protection grade: IPX6;
- Temperature range: –40℃ to 105℃
- Single–hole card wire specification :4 –11mm;

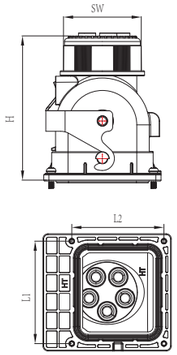

型号 Thread Spec.	颜色 Color	孔数×孔径 (Φ)mm	安装孔距 Mounting hole distance (L1)mm	(L2)mm	组合高度 combined altitudes (H)mm	螺帽扳手尺寸 Spanner (SW)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
RSFP-3×11+2×11	黑色/BK	3×11+2×11	59.6	53.6	84.3	45.2	4-M3x0.5-6H	RSFP-59.6×53.6D-3×11Q+2×11

RSFP 法兰式尼龙防水接头/Flanged nylon waterproof joint



* 特殊规格请垂询
Pre–install Oring or other colors please consult us

- 塑料材料： PA6或PA66，V0阻燃等级，参照UL94
- 密封件： 硅胶、EPDM
- 防护等级：卡口范围内，配套密封圈，IP67
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： 用螺钉连接更紧密可靠
  改进型护套，保护连接安全

- Material： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,SI
- IP Grade：clamping range，O–ring，IP68
- Temperature Limited：–40℃–100℃，short– term120℃
- Products Feature： Using the screw connection is tighter and more reliable. Protecting connection safe by using improved protective sealings



型号 Thread Spec.	颜色 Color	孔数×孔径 (Φ)mm	安装孔距 Mounting hole distance (L1)mm	(L2)mm	组合高度 combined altitudes (H)mm	螺帽扳手尺寸 Spanner (SW)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
RSFP-3×7+3×4	黑色/BK	3×7+3×4	62	48	40	37.3	4-M3×0.5-6H	RSFP-62x48A-3x7+3x4

RSFP 法兰式尼龙防水接头/Flanged nylon waterproof joint



* 特殊规格请垂询
Pre–install Oring or other colors please consult us

- 符合RoHS标准:
- 阻燃等级:尼龙材质:UL94 V-0;
  橡胶材质:UL94 V-0;;
- 防护等级：IP67;
- 温度范围：-40℃-105℃;
- 单孔卡线规格:5.5-7mm;

- Flame Retardant grade: Nylon material :UL94 V–0;
  Rubber material :UL94 V–0;
- Protection grade: IP67;
- Temperature range: –40℃ to 105℃
- Single–hole card wire specification :5.5 –7mm;

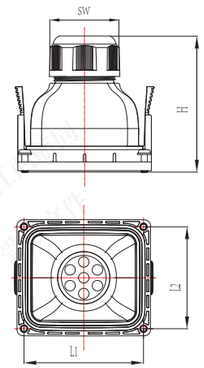

型号 Thread Spec.	颜色 Color	孔数×孔径 (Φ)mm	安装孔距 Mounting hole distance (L1)mm	(L2)mm	组合高度 combined altitudes (H)mm	螺帽扳手尺寸 Spanner (SW)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
RSFP-7x6	黑色/BK	7x6	68	58	75	37.3	4-M4x0.7-6H	RSFP-68x58A-7x6
RSFP-4x5.3Q+10x1.5	黑色/BK	4x5.3+10x1.3	68	58	75	37.3	4-M4x0.7-6H	RSFP-68x58A-4x5.3Q+10x1.5
RSFP-5x7+1x7	黑色/BK	6x7	68	58	75	37.3	4-M4x0.7-6H	RSFP-68x58A-5x7Q+1x7

RSFP 法兰式尼龙防水接头/Flanged nylon waterproof joint



* 特殊规格请垂询
Pre–install Oring or other colors please consult us

- 符合RoHS标准:
- 阻燃等级:尼龙材质:UL94 V-0;
  橡胶材质:UL94 HB;
- 防护等级：IP66;
- 温度范围：-40℃-105℃;
- 单孔卡线规格:4-8mm;

- Flame Retardant grade: Nylon material :UL94 V–0;
  Rubber material :UL94 V–HB;
- Protection grade: IP66;
- Temperature range: –40℃ to 105℃
- Single–hole card wire specification :4 –8mm;



型号 Thread Spec.	颜色 Color	孔数×孔径 (Φ)mm	安装孔距 Mounting hole distance (L1)mm	(L2)mm	组合高度 combined altitudes (H)mm	螺帽扳手尺寸 Spanner (SW)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
RSFP-4x8	黑色/BK	4x8	76	64	72.8	48	4-M4x0.7-6H	RSFP-76x64A-4x8Q

RSFP-78*50-18-BK-SJ 电池端子防护罩/Battery terminal protective cover

RSFP-83*70-7-BK-SJ 通讯端子防护罩/Communication terminal protective cover



RSFP-78*50-18-BK-SJ



RSFP-83*70-7-BK-SJ

说明/Description	颜色/Colour	型号/Type	型号/Type
防护罩/Protective shield	黑色 BK	RSFP-78*50-18-BK-SJ	RSFP-83*70-7-BK-SJ
端子尺寸/Dimension			
外形尺寸（长/宽/高） Dimensions (length A/width B/height H)	mm	见示意图/As diagram	见示意图/As diagram
安装尺寸/Installation size	mm	见示意图/As diagram	见示意图/As diagram
卡线范围/Wiring range			
紧固圈/Fastening ring	mm	DC60	5~6.5
其他数据Other data			
尼龙螺帽扭矩/Torque of nylon nut	/N·m	12-50	6
螺钉扭矩/Screw torque	/N·m	1.6	1.6
防护等级/Protection level		IP67	IP67
绝缘材料类型/Insulation material 根据GB30847 / UL94确定的阻燃等级 In accordance with GB30847 / UL94		PA V-0	PA V-0
执行标准/Standard		IEC60529 GB/T 4208	IEC60529 GB/T 4208

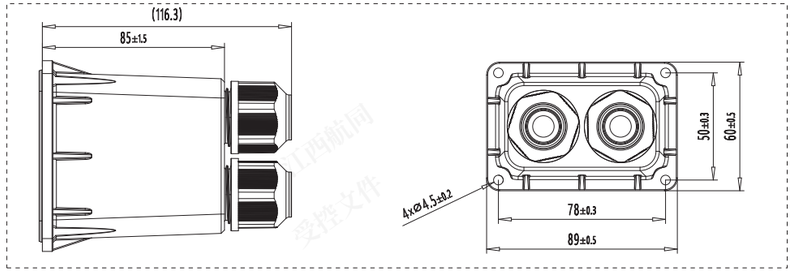

RSFP-78*50-18-BK-SJ

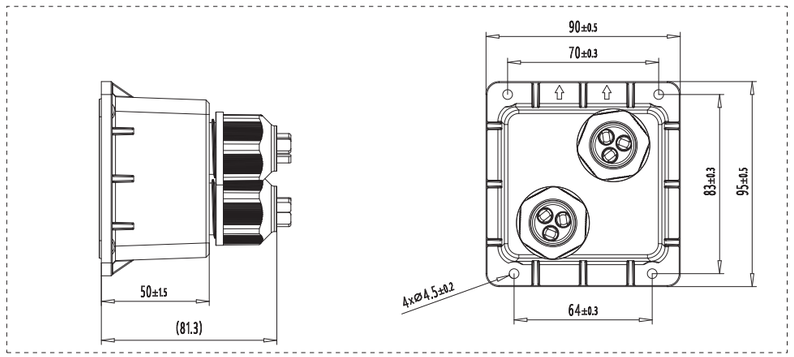

RSFP-83*70-7-BK-SJ

RSKP-M-F 分体式尼龙防水接头/Split nylon waterproof joint Cable Gland



* 特殊规格请垂询
Pre–install Oring or other colors please consult us

- 塑料材料： PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： O型圈或平垫圈自选，连接更紧密
  改进型护套，保护连接安全

- Material ： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O–ring，IP68
- Temperature Limited：–40℃–100℃，short– term120℃
- Products Feature： Connecting more smoothly & closely with double–thread & O–ring groove. Protecting connection safe by using improved protective sealings



型号 Thread Spec.	颜色 Color	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
M25×1.5	黑色/BK 灰色/GY	7-10	25	10	37	33	33	Φ25.2-Φ25.4	RSKP-M25B-F
M25×1.5	黑色/BK 灰色/GY	8.5-13	25	10	37	33	33	Φ25.2-Φ25.4	RSKP-M25E-F
M63×1.5	黑色/BK 灰色/GY	43.5-51	63	25	60	78	78	Φ63.3-Φ63.5	RSKP-M63A-F
M75×1.5	黑色/BK 灰色/GY	59-66	75	25	60	92	92	Φ75.3-Φ75.5	RSKP-M75A-F
M90×2.0	黑色/BK 灰色/GY	68-77	90	25	60	110	109	Φ90.3-Φ90.5	RSKP-M90A-F

RSKP-PG-F 分体式尼龙防水接头/Split nylon cable gland



* 特殊规格请垂询
Pre–install Oring or other colors please consult us

- 塑料材料材料： PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： O型圈或平垫圈自选，连接更紧密
  改进型护套，保护连接安全

- Material ： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O–ring，IP68
- Temperature Limited：–40℃–100℃，short– term120℃
- Products Feature： Connecting more smoothly & closely with double–thread & O–ring groove. Protecting connection safe by using improved protective sealings



型号 Thread Spec.	颜色 Color	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
PG21	黑色/BK 灰色/GY	7-10	28.3	11	37	33	33	Φ28.5-Φ28.8	RSKP-PG21B-F
PG21	黑色/BK 灰色/GY	8.5-13	28.3	11	37	33	33	Φ28.5-Φ28.8	RSKP-PG21E-F
PG21	黑色/BK 灰色/GY	16-22	28.3	12	38	39	36	Φ28.5-Φ28.8	RSKP-PG21E1-F

RHQCF 分体式防水型软管接头/Split waterproof hose nylon joint



* 特殊规格请垂询
Pre–install Oring or other colors please consult us

- 塑料材料： PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： O型圈或平垫圈自选，连接更紧密
  改进型护套，保护连接安全

- Material ： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O–ring，IP68
- Temperature Limited：–40℃–100℃，short– term120℃
- Products Feature： Connecting more smoothly & closely with double–thread & O–ring groove. Protecting connection safe by using improved protective sealings



型号 Thread Spec.	颜色 Color	适配软管 Hose size (AD)mm	螺纹长度 Thread length (GL)mm	螺纹外径 Thread OD (AG)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
HQCF-M25-AD28.5	黑色/BK 灰色/GY	28.5	15	25	Φ25.2-Φ25.4	HQCF-M25
HQCF-M32-AD32	黑色/BK 灰色/GY	32.0	15	32	Φ32.2-Φ32.4	HQCF-M32
HQCF-M32-AD34.5	黑色/BK 灰色/GY	34.5	15	32	Φ32.2-Φ32.4	HQCF-M32
HQCF-M40-AD42.5	黑色/BK 灰色/GY	42.5	15	40	Φ40.3-Φ40.5	HQCF-M40

RPK-M/PG/NPT 尼龙闷盖/Nylon blanking plug



* 特殊规格请垂询
Pre–install Oring or other colors please consult us

- 塑料材料： PA6或PA66，V0或V2阻燃等级，参照UL94
- 密封件： 硅胶、EPDM或丁腈橡胶
- 防护等级：卡口范围内，配套密封圈，IP68
- 温度范围：-40℃-100℃，短时120℃
- 产品特性： O型圈或平垫圈自选，连接更紧密

- Material ： PA6/PA66，V0 Level Acc. to UL94
- Sealing Material： EPDM,NBR,SI
- IP Grade：clamping range，O–ring，IP68
- Temperature Limited：–40℃–100℃，short– term120℃
- Products Feature： Optional O–ring or flat washer for tighter connection.



RPK-M

型号 Thread Spec.	颜色 Color	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	闷盖外径 Blanking plug OD (D)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
M12×1.5	黑色/BK 灰色/GY	12	13	16	Φ12.2-Φ12.4	RPK-M12-13
M16×1.5	黑色/BK 灰色/GY	16	10	19	Φ16.2-Φ16.4	RPK-M16-10
M18×1.5	黑色/BK 灰色/GY	18	10	22	Φ18.2-Φ18.4	RPK-M18-10
M20×1.5	黑色/BK 灰色/GY	20	10	24	Φ20.2-Φ20.4	RPK-M20-10
M20×1.5	黑色/BK 灰色/GY	20	12	25	Φ20.2-Φ20.4	RPK-H-M20-12
M22×1.5	黑色/BK 灰色/GY	22	10	27	Φ22.2-Φ22.4	RPK-M22-10
M25×1.5	黑色/BK 灰色/GY	25	15	30.5	Φ25.2-Φ25.4	RPK-M25-15
M32×1.5	黑色/BK 灰色/GY	32	11	38	Φ32.2-Φ32.4	RPK-M32-11
M40×1.5	黑色/BK 灰色/GY	40	15	52	Φ40.3-Φ40.5	RPK-M40-15
M50×1.5	黑色/BK 灰色/GY	50	12	56	Φ50.3-Φ50.5	RPK-M50-12
M63×1.5	黑色/BK 灰色/GY	63	6.5	70	Φ63.3-Φ63.5	RPK-M63-6.5
M63×1.5	黑色/BK 灰色/GY	63	14	70	Φ63.3-Φ63.5	RPK-M63-14

RPK-PG

型号 Thread Spec.	颜色 Color	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	闷盖外径 Blanking plug OD (D)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
PG13.5	黑色/BK 灰色/GY	20.4	10	24	Φ20.6-Φ20.9	RPK-PG13.5-10
PG48	黑色/BK 灰色/GY	59.3	14	69	Φ59.5-Φ59.8	RPK-PG48-14

RPK-NPT

型号 Thread Spec.	颜色 Color	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	闷盖外径 Blanking plug OD (D)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
RPK-NPT1	黑色/BK 灰色/GY	33.4	15	42	Φ33.6-Φ33.8	RPK-NPT1-15

RXT/RPT 堵塞头 Nylon screw plug



* 特殊规格请垂询
Pre–install Oring or other colors please consult us

- 材料：硅胶、EPDM
- 温度范围：-40-120℃
- 性能：耐油
- 产品特性：适用于电缆防水接头不穿电缆时，防水、防尘

- Material: Silicone, EPDM
- Temperature Range: –40–120℃
- Performance: oil resistant
- Product Features: It is waterproof and dustproof when the waterproof cable connector does not run the cable.



RXT

型号 Thread Spec.	颜色 Color	外径 OD (D)mm	外径 OD (d)mm	高度 Highness (h)mm	厚度 Thickness (t)mm	货号 Item No.
RXT-3.9	黑色/BK	4.3	3.9	17	2	RXT-3.9
RXT-5	黑色/BK	5.6	5	17	2	RXT-5
RXT-6	黑色/BK	6.5	6	17	2	RXT-6
RXT-6.5	黑色/BK	6.9	6.5	17	2	RXT-6.5
RXT-7	黑色/BK	7.6	7	27	1	RXT-7
RXT-8.5	黑色/BK	9	8.5	27	1	RXT-8.5
RXT-9.9	黑色/BK	10.3	10.3	17	2	RXT-9.9
RXT-12.5	黑色/BK	15	12.5	17	2	RXT-12.5
RXT-15	黑色/BK	17.5	15	20	2	RXT-15



* 特殊规格请垂询
Pre–install Oring or other colors please consult us

- 材料：PA6或PA66，V0或V2阻燃等级，参照UL94
- 温度范围：-40-100℃，短时120℃
- 产品特性：适用于电缆防水接头不穿电缆时，防水、防尘

- Material： PA6/PA66，V0 Level Acc. to UL94
- Temperature Range: –40–120℃
- Product Features: It is waterproof and dustproof when the waterproof cable connector does not run the cable.



RPT

型号 Thread Spec.	颜色 Color	外径 OD (D)mm	外径 OD (d)mm	高度 Highness (h)mm	厚度 Thickness (t)mm	货号 Item No.
RPT-7	黑色/BK 灰色/GY	15	7	15	2	RPT-7
RPT-8	黑色/BK 灰色/GY	13	8	28.5	2.5	RPT-8
RPT-8.8	黑色/BK 灰色/GY	14	8.8	20	2.5	RPT-8.8
RPT-10.5	黑色/BK 灰色/GY	20	10.5	20	2.5	RPT-10.5
RPT-13	黑色/BK 灰色/GY	17	13	20	2.5	RPT-13
RPT-15.5	黑色/BK 灰色/GY	30	15.5	20	2.5	RPT-15.5
RPT-17	黑色/BK 灰色/GY	19.5	17	10	2	RPT-17
RPT-18	黑色/BK 灰色/GY	30	18	20	2.5	RPT-18
RPT-20	黑色/BK 灰色/GY	28	20	12	2	RPT-20
RPT-22	黑色/BK 灰色/GY	28	22	12	2	RPT-22
RPT-24	黑色/BK 灰色/GY	27	24	12.5	1	RPT-24
RPT-24.5	黑色/BK 灰色/GY	32	24.5	25	2.5	RPT-24.5
RPT-25.5	黑色/BK 灰色/GY	40	25.5	25	2.5	RPT-25.5
RPT-28	黑色/BK 灰色/GY	35	28	13.5	1	RPT-28
RPT-29.5	黑色/BK 灰色/GY	35	29.5	13.5	1	RPT-29.5
RPT-31	黑色/BK 灰色/GY	40	31	25	2.5	RPT-31
RPT-37	黑色/BK 灰色/GY	46	37	25	2.5	RPT-37
RPT-37D	黑色/BK 灰色/GY	41	37	12.5	2	RPT-37D
RPT-40	黑色/BK 灰色/GY	49	40	15	2.5	RPT-40
RPT-43	黑色/BK 灰色/GY	50	43	20	2.5	RPT-43
RPT-56	黑色/BK 灰色/GY	64	56	24.5	2.5	RPT-56

RMK 尼龙螺母 Nylon lock-nut



- 材料： PA6或PA66，V0或V2阻燃等级，参照UL94
- 温度范围：-40-100℃，短时120℃

- Material： PA6/PA66，V0 Level Acc. to UL94
- Temperature Limited：–40℃–100℃，short– term120℃



* 特殊规格请垂询
Pre–install Oring or other colors please consult us

螺纹 Thread	型号 Thread Spec.	颜色 Color	扳手尺寸 Spanner (SW)mm	厚度 Thickness (t)mm	货号 Item No.
RMK-M	M12×1.5	黑色/BK 灰色/GY	17	5	RMK-M12
	M16×1.5	黑色/BK 灰色/GY	22	6	RMK-M16
	M18×1.5	黑色/BK 灰色/GY	24	5	RMK-M18
	M20×1.5	黑色/BK 灰色/GY	27	6	RMK-M20
	M22×1.5	黑色/BK 灰色/GY	30	6	RMK-M22
	M25×1.5	黑色/BK 灰色/GY	33	6.5	RMK-M25
	M32×1.5	黑色/BK 灰色/GY	41	7	RMK-M32
	M32×1.5	黑色/BK 灰色/GY	39	7	RMK-M32-S
	M40×1.5	黑色/BK 灰色/GY	50	7	RMK-M40
	M50×1.5	黑色/BK 灰色/GY	60	8	RMK-M50
	M63×1.5	黑色/BK 灰色/GY	75	8	RMK-M63
	M72×2.0	黑色/BK 灰色/GY	90	8.5	RMK-M72
	M90x2.0	黑色/BK 灰色/GY	109	11	RMK-M90
RMK-PG	PG7	黑色/BK 灰色/GY	19	5	RMK-PG7
	PG9	黑色/BK 灰色/GY	22	5	RMK-PG9
	PG11	黑色/BK 灰色/GY	24	5	RMK-PG11
	PG13.5	黑色/BK 灰色/GY	27	6	RMK-PG13.5
	PG16	黑色/BK 灰色/GY	30	6	RMK-PG16
	PG21	黑色/BK 灰色/GY	36	7	RMK-PG21
	PG29	黑色/BK 灰色/GY	46	7	RMK-PG29
	PG36	黑色/BK 灰色/GY	60	8	RMK-PG36
	PG42	黑色/BK 灰色/GY	65	8	RMK-PG42
	PG48	黑色/BK 灰色/GY	70	8	RMK-PG48
RMK-NPT	NPT1/2"	黑色/BK 灰色/GY	27	6	RMK-NPT1/2
	NPT3/4"	黑色/BK 灰色/GY	33	7	RMK-NPT3/4
	NPT1"	黑色/BK 灰色/GY	42	7	RMK-NPT1
	NPT1 1/4"	黑色/BK 灰色/GY	53	7	RMK-NPT1 1/4
	NPT2"	黑色/BK 灰色/GY	68	8	RMK-NPT2
	NPT2 1/2"	黑色/BK 灰色/GY	80	12	RMK-NPT2 1/2

RSKM系列 金属电缆接头

RSKM Metal cable gland

RSKM 金属电缆接头采用优质原料材料和先进的技术，以满足先进的工业电气要求。提供不同的夹紧范围、螺纹长度、螺纹类型。

防护等级：卡口范围内，O型密封圈，IP68。

RSKM Metal cable gland uses high quality raw materials and advanced technology to meet advanced industrial electrical requirements. And offer different clamping ranges, thread lengths, thread types.

Seals: Silicone, EPDM or NBR

CE IP68

RSKM 电缆防水接头型号规格命名方法/Waterproof Cable Gland model specification Codeing Regulation

R S K M – M 2 5 A – 3 x 6.1 – L – C-PMS

- P：密封圈Seal,M：螺母（可选）nut(optional),S：堵塞头（可选）seal plug(optional)
- C：黄铜镀镍/Nickel plated brass,AL：铝合金/Aluminum alloy,S：不锈钢/Stainless steel
- 螺纹加长型,普通型不写/Thread extension type, ordinary type do not write.
- 多芯结构,3x6.1：表示 孔数目为3 孔直径为6.1mm,单芯结构不写
  Multi–core structure 3x6.1： indicates that 3 holes and the hole diameter is 6.1mm.
  (The single–core structure do not write.)
- 区分卡线范围:Marking Cable Range
- 螺纹大小规格/Thread size
- M：公制螺纹,P：德制螺纹（PG）,N：美制螺纹（NPT）,G：英制螺纹
  M: Metric thread, P: German thread (PG), N: American thread (NPT), G: Inch thread
- RSKM：产品类别代码

基本选型：

1、确定接头材质

2、依电缆直径选好卡线范围

3、以固位孔直径选好螺纹规格

Basic selection:

1. Determine the cable gland material
2. Select the cable range according to the diameter of the cable
3. Select the thread specification according to the diameter of the retaining hole

* 其它特殊要求请与相关技术员协商

* For other special requirements, please consult with the relevant technicians



RSKM-M 普通金属电缆防水接头/Waterproof metal cable gland



* 特殊规格请垂询
For special specifications, please inquire

- 金属材料：黄铜镀镍
- 塑料材料：PA6或PA66
- 密封件：硅胶、EPDM或丁腈橡胶
- 温度范围：-40-100℃，短时120℃
- 产品特性：O型圈环槽，连接更紧密
  改进型护套，保护连接安全

- Material： Brass nickel–Plated
- Plastic material: PA6 or PA66
- Seals: Silicone, EPDM or NBR
- Temperature：–40℃–100℃，short term120℃
- Products Features:Connecting more smoothly with O–ring groove.
  Protecting connection safe by using improved protective sealings



型号 Thread Spec.	材质 Material	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
M12×1.5		3-6.5	12	7	18	14	14	Φ12.2-Φ12.4	RSKM-M12A-C-OM
M12×1.5	CU	2-5	12	7	18	14	14	Φ12.2-Φ12.4	RSKM-M12B-C-OM
M12×1.5		4-8	12	7	22	20	20	Φ12.2-Φ12.4	RSKM-M12C-C-OM
M16×1.5		4-8	16	7	22	20	20	Φ16.2-Φ16.4	RSKM-M16A-C-OM
M16×1.5	CU	2-6	16	7	22	20	20	Φ16.2-Φ16.4	RSKM-M16B-C-OM
M16×1.5		5-10	16	7	22	20	22	Φ16.2-Φ16.4	RSKM-M16C-C-OM
M18×1.5		5-10	18	7	22	20	22	Φ18.2-Φ18.4	RSKM-M18A-C-OM
M18×1.5	CU	3-7	18	7	22	20	22	Φ18.2-Φ18.4	RSKM-M18B-C-OM
M18×1.5		6-12	18	7	24	24	24	Φ18.2-Φ18.4	RSKM-M18C-C-OM
M20×1.5		6-12	20	8	24	24	24	Φ20.2-Φ20.4	RSKM-M20A-C-OM
M20×1.5	CU	5-9	20	8	24	24	24	Φ20.2-Φ20.4	RSKM-M20B-C-OM
M20×1.5		8-14	20	8	24	24	24	Φ20.2-Φ20.4	RSKM-M20C-C-OM
M22×1.5		8-14	22	8	24	24	24	Φ22.2-Φ22.4	RSKM-M22A-C-OM
M22×1.5	CU	6-12	22	8	24	24	24	Φ22.2-Φ22.4	RSKM-M22B-C-OM
M22×1.5		9-16	22	8	26	30	30	Φ22.2-Φ22.4	RSKM-M22C-C-OM
M25×1.5		13-18	25	8	26	30	30	Φ25.2-Φ25.4	RSKM-M25A-C-OM
M25×1.5	CU	9-16	25	8	26	30	30	Φ25.2-Φ25.4	RSKM-M25B-C-OM
M25×1.5		8-14	25	8	24	24	30	Φ25.2-Φ25.4	RSKM-M25C-C-OM
M32×1.5		18-25	32	10	32	40	40	Φ32.3-Φ32.5	RSKM-M32A-C-OM
M32×1.5	CU	13-20	32	10	32	40	40	Φ32.3-Φ32.5	RSKM-M32B-C-OM
M32×1.5		15-22	32	10	32	40	40	Φ32.3-Φ32.5	RSKM-M32C-C-OM
M36×1.5		18-25	36	10	37	42	42	Φ36.3-Φ36.5	RSKM-M36A-C-OM
M36×1.5	CU	15-22	36	10	37	42	42	Φ36.3-Φ36.5	RSKM-M36B-C-OM
M36×1.5		21-28	36	10	38	52	50	Φ36.3-Φ36.5	RSKM-M36C-C-OM
M40×1.5		22-32	40	10	38	52	50	Φ40.3-Φ40.5	RSKM-M40A-C-OM
M40×1.5	CU	20-26	40	10	38	52	50	Φ40.3-Φ40.5	RSKM-M40B-C-OM
M40×1.5		28-33	40	10	38	52	50	Φ40.3-Φ40.5	RSKM-M40C-C-OM
M50×1.5		32-38	50	11	49	57	55	Φ50.3-Φ50.5	RSKM-M50A-C-OM
M50×1.5	CU	25-31	50	11	49	57	55	Φ50.3-Φ50.5	RSKM-M50B-C-OM
M50×1.5		37-44	50	11	41	65	67	Φ50.3-Φ50.5	RSKM-M50C-C-OM
M50×1.5		30-35	50	11	49	57	55	Φ50.3-Φ50.5	RSKM-M50F-C-OM
M63×1.5	CU	37-44	63	11	41	65	67	Φ63.3-Φ63.5	RSKM-M63A-C-OM
M63×1.5		29-35	63	11	41	65	67	Φ63.3-Φ63.5	RSKM-M63B-C-OM

RSKM-M-L 普通金属电缆防水接头（加长）/Waterproof metal cable gland(lengthen)



- 金属材料：黄铜镀镍
- 塑料材料：PA6或PA66
- 密封件：硅胶、EPDM或丁腈橡胶
- 温度范围：-40-100℃，短时120℃
- 产品特性：O型圈环槽，连接更紧密
  改进型护套，保护连接安全



- Material： Brass nickel–Plated
- Plastic material: PA6 or PA66
- Seals: Silicone, EPDM or NBR
- Temperature：–40℃–100℃，short term120℃
- Products Features:Connecting more smoothly with O–ring groove.
  Protecting connection safe by using improved protective sealings

* 特殊规格请垂询
For special specifications, please inquire

型号 Thread Spec.	材质 Material	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
M12×1.5		3-6.5	12	15	18	14	14	Φ12.2-Φ12.4	RSKM-M12A-L-C-OM
M12×1.5	CU	2-5	12	15	18	14	14	Φ12.2-Φ12.4	RSKM-M12B-L-C-OM
M12×1.5		4-8	12	15	22	20	20	Φ12.2-Φ12.4	RSKM-M12C-L-C-OM
M16×1.5		4-8	16	15	22	20	20	Φ16.2-Φ16.4	RSKM-M16A-L-C-OM
M16×1.5	CU	2-6	16	15	22	20	20	Φ16.2-Φ16.4	RSKM-M16B-L-C-OM
M16×1.5		5-10	16	15	22	20	22	Φ16.2-Φ16.4	RSKM-M16C-L-C-OM
M18×1.5		5-10	18	15	22	20	22	Φ18.2-Φ18.4	RSKM-M18A-L-C-OM
M18×1.5	CU	3-7	18	15	22	20	22	Φ18.2-Φ18.4	RSKM-M18B-L-C-OM
M18×1.5		6-12	18	15	24	24	24	Φ18.2-Φ18.4	RSKM-M18C-L-C-OM
M20×1.5		6-12	20	15	24	24	24	Φ20.2-Φ20.4	RSKM-M20A-L-C-OM
M20×1.5	CU	5-9	20	15	24	24	24	Φ20.2-Φ20.4	RSKM-M20B-L-C-OM
M20×1.5		8-14	20	15	24	24	24	Φ20.2-Φ20.4	RSKM-M20C-L-C-OM
M22×1.5		8-14	22	15	24	24	24	Φ22.2-Φ22.4	RSKM-M22A-L-C-OM
M22×1.5	CU	6-12	22	15	24	24	24	Φ22.2-Φ22.4	RSKM-M22B-L-C-OM
M22×1.5		9-16	22	15	26	30	30	Φ22.2-Φ22.4	RSKM-M22C-L-C-OM
M25×1.5		13-18	25	15	26	30	30	Φ25.2-Φ25.4	RSKM-M25A-L-C-OM
M25×1.5	CU	9-16	25	15	26	30	30	Φ25.2-Φ25.4	RSKM-M25B-L-C-OM
M25×1.5		8-14	25	15	24	24	30	Φ25.2-Φ25.4	RSKM-M25C-L-C-OM
M32×1.5		18-25	32	15	32	40	40	Φ32.2-Φ32.4	RSKM-M32A-L-C-OM
M32×1.5	CU	13-20	32	15	32	40	40	Φ32.2-Φ32.4	RSKM-M32B-L-C-OM
M32×1.5		15-22	32	15	32	40	40	Φ32.2-Φ32.4	RSKM-M32C-L-C-OM
M36×1.5		18-25	36	15	37	42	42	Φ36.3-Φ36.5	RSKM-M36A-L-C-OM
M36×1.5	CU	15-22	36	15	37	42	42	Φ36.3-Φ36.5	RSKM-M36B-L-C-OM
M36×1.5		21-28	36	15	38	52	50	Φ36.3-Φ36.5	RSKM-M36C-L-C-OM
M40×1.5		22-32	40	15	38	52	50	Φ40.3-Φ40.5	RSKM-M40A-L-C-OM
M50×1.5	CU	32-38	50	15	49	57	55	Φ50.3-Φ50.5	RSKM-M50A-L-C-OM
M50×1.5		30-35	50	15	49	57	55	Φ50.3-Φ50.5	RSKM-M50F-L-C-OM
M63×1.5	CU	37-44	63	15	41	65	67	Φ63.3-Φ63.5	RSKM-M63A-L-C-OM
M63×1.5		29-35	63	15	41	65	67	Φ63.3-Φ63.5	RSKM-M63B-L-C-OM

RSKM-PG 普通金属电缆防水接头 /Waterproof metal cable gland



- 金属材料：黄铜镀镍
- 塑料材料：PA6或PA66
- 密封件：硅胶、EPDM或丁腈橡胶
- 温度范围：-40-100℃，短时120℃
- 产品特性：O型圈环槽，连接更紧密
  改进型护套，保护连接安全



- Material： Brass nickel–Plated
- Plastic material: PA6 or PA66
- Seals: Silicone, EPDM or NBR
- Temperature：–40℃–100℃，short term120℃
- Products Features:Connecting more smoothly with O–ring groove.
  Protecting connection safe by using improved protective sealings

* 特殊规格请垂询
For special specifications, please inquire

型号 Thread Spec.	材质 Material	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
PG7		3-6.5	12.5	7	18	14	14	Φ12.7-Φ12.9	RSKM-PG7A-C-OM
PG7	CU	2-5	12.5	7	18	14	14	Φ12.7-Φ12.9	RSKM-PG7B-C-OM
PG7		4-8	12.5	7	22	20	20	Φ12.7-Φ12.9	RSKM-PG7C-C-OM
PG9		4-8	15.2	7	22	20	20	Φ15.4-Φ15.6	RSKM-PG9A-C-OM
PG11		5-10	18.6	7	22	20	22	Φ18.8-Φ19.0	RSKM-PG11A-C-OM
PG11	CU	3-7	18.6	7	22	20	22	Φ18.8-Φ19.0	RSKM-PG11B-C-OM
PG11		6-12	18.6	7	24	24	24	Φ18.8-Φ19.0	RSKM-PG11C-C-OM
PG13.5		6-12	20.4	8	24	24	24	Φ20.6-Φ20.8	RSKM-PG13.5A-C-OM
PG13.5	CU	5-9	20.4	8	24	24	24	Φ20.6-Φ20.8	RSKM-PG13.5B-C-OM
PG13.5		8-14	20.4	8	24	24	24	Φ20.6-Φ20.8	RSKM-PG13.5C-C-OM
PG16		8-14	22.5	8	24	24	27	Φ22.7-Φ22.9	RSKM-PG16A-C-OM
PG21		13-18	28.3	8	26	30	30	Φ28.5-Φ28.7	RSKM-PG21A-C-OM
PG21	CU	9-16	28.3	8	26	30	30	Φ28.5-Φ28.7	RSKM-PG21B-C-OM
PG21		8-14	28.3	8	24	24	30	Φ28.5-Φ28.7	RSKM-PG21C-C-OM
PG29		18-25	37	10	32	40	40	Φ37.3-Φ37.5	RSKM-PG29A-C-OM
PG29	CU	13-20	37	10	32	40	40	Φ37.3-Φ37.5	RSKM-PG29B-C-OM
PG29		15-22	37	10	32	40	40	Φ37.3-Φ37.5	RSKM-PG29C-C-OM
PG36		22-32	47	10	38	52	50	Φ47.4-Φ47.6	RSKM-PG36A-C-OM
PG36	CU	20-26	47	10	38	52	50	Φ47.4-Φ47.6	RSKM-PG36B-C-OM
PG36		28-33	47	10	38	52	50	Φ47.4-Φ47.6	RSKM-PG36C-C-OM
PG42		32-38	54	11	49	57	57	Φ54.3-Φ54.5	RSKM-PG42A-C-OM
PG42	CU	25-31	54	11	49	57	57	Φ54.3-Φ54.5	RSKM-PG42B-C-OM
PG42		37-44	54	11	41	65	67	Φ54.3-Φ54.5	RSKM-PG42C-C-OM
PG48		37-44	59.3	11	41	65	67	Φ59.6-Φ59.8	RSKM-PG48A-C-OM
PG48	CU	29-35	59.3	11	41	65	67	Φ59.6-Φ59.8	RSKM-PG48B-C-OM
PG48		42-53	59.3	11	41	75	75	Φ59.6-Φ59.8	RSKM-PG48C-C-OM

RSKM-PG-L 普通金属电缆防水接头（加长）/Waterproof metal cable gland(lengthen)



- 金属材料：黄铜镀镍
- 塑料材料：PA6或PA66
- 密封件：硅胶、EPDM或丁腈橡胶
- 温度范围：-40-100℃，短时120℃
- 产品特性：O型圈环槽，连接更紧密
  改进型护套，保护连接安全

- Material： Brass nickel–Plated
- Plastic material: PA6 or PA66
- Seals: Silicone, EPDM or NBR
- Temperature：–40℃–100℃，short term120℃
- Products Features:Connecting more smoothly with O–ring groove.
  Protecting connection safe by using improved protective sealings



* 特殊规格请垂询
For special specifications, please inquire

型号 Thread Spec.	材质 Material	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
PG7		3-6.5	12.5	15	18	14	14	Φ12.7-Φ12.9	RSKM-PG7A-L-C-OM
PG7	CU	2-5	12.5	15	18	14	14	Φ12.7-Φ12.9	RSKM-PG7B-L-C-OM
PG7		4-8	12.5	15	22	20	20	Φ12.7-Φ12.9	RSKM-PG7C-L-C-OM
PG9		4-8	15.2	15	22	20	20	Φ15.4-Φ15.6	RSKM-PG9A-L-C-OM
PG11		5-10	18.6	15	22	20	22	Φ18.8-Φ19.0	RSKM-PG11A-L-C-OM
PG11	CU	3-7	18.6	15	22	20	22	Φ18.8-Φ19.0	RSKM-PG11B-L-C-OM
PG11		6-12	18.6	15	24	24	24	Φ18.8-Φ19.0	RSKM-PG11C-L-C-OM
PG13.5		6-12	20.4	15	24	24	24	Φ20.6-Φ20.8	RSKM-PG13.5A-L-C-OM
PG13.5	CU	5-9	20.4	15	24	24	24	Φ20.6-Φ20.8	RSKM-PG13.5B-L-C-OM
PG13.5		8-14	20.4	15	24	24	24	Φ20.6-Φ20.8	RSKM-PG13.5C-L-C-OM
PG16	CU	8-14	22.5	15	24	24	27	Φ22.7-Φ22.9	RSKM-PG16A-L-C-OM
PG21		13-18	28.3	15	26	30	30	Φ28.5-Φ28.7	RSKM-PG21A-L-C-OM
PG21	CU	9-16	28.3	15	26	30	30	Φ28.5-Φ28.7	RSKM-PG21B-L-C-OM
PG21		8-14	28.3	15	24	24	30	Φ28.5-Φ28.7	RSKM-PG21C-L-C-OM
PG29		18-25	37	15	32	40	40	Φ37.3-Φ37.5	RSKM-PG29A-L-C-OM
PG29	CU	13-20	37	15	32	40	40	Φ37.3-Φ37.5	RSKM-PG29B-L-C-OM
PG29		15-22	37	15	32	40	40	Φ37.3-Φ37.5	RSKM-PG29C-L-C-OM
PG36		22-32	47	15	38	52	50	Φ47.3-Φ47.5	RSKM-PG36A-L-C-OM
PG36	CU	20-26	47	15	38	52	50	Φ47.3-Φ47.5	RSKM-PG36B-L-C-OM
PG36		28-33	47	15	38	52	50	Φ47.3-Φ47.5	RSKM-PG36C-L-C-OM
PG42		32-38	54	15	49	57	57	Φ54.3-Φ54.5	RSKM-PG42A-L-C-OM
PG42	CU	25-31	54	15	49	57	57	Φ54.3-Φ54.5	RSKM-PG42B-L-C-OM
PG42		37-44	54	15	41	65	67	Φ54.3-Φ54.5	RSKM-PG42C-L-C-OM
PG48		37-44	59.3	15	41	65	67	Φ59.6-Φ59.8	RSKM-PG48A-L-C-OM
PG48	CU	29-35	59.3	15	41	65	67	Φ59.6-Φ59.8	RSKM-PG48B-L-C-OM
PG48		42-53	59.3	15	41	75	75	Φ59.6-Φ59.8	RSKM-PG48C-L-C-OM

RSKM-NPT 普通金属电缆防水接头/Waterproof metal cable gland



- 金属材料：黄铜镀镍
- 塑料材料：PA6或PA66
- 密封件：硅胶、EPDM或丁腈橡胶
- 温度范围：-40-100℃，短时120℃
- 产品特性：O型圈环槽，连接更紧密
  改进型护套，保护连接安全

- Material： Brass nickel–Plated
- Plastic material: PA6 or PA66
- Seals: Silicone, EPDM or NBR
- Temperature：–40℃–100℃，short term120℃
- Products Features:Connecting more smoothly with O–ring groove.
  Protecting connection safe by using improved protective sealings



* 特殊规格请垂询
For special specifications, please inquire

型号 Thread Spec.	材质 Material	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
NPT1/4	CU	3-6.5	13.7	7	19	14	14	Φ13.9-Φ14.1	RSKM-N1/4A-C-OM
NPT1/4		2-5	13.7	7	19	14	14	Φ13.9-Φ14.1	RSKM-N1/4B-C-OM
NPT3/8	CU	4-8	17.4	7	21	20	20	Φ17.6-Φ17.8	RSKM-N3/8A-C-OM
NPT3/8		2-6	17.4	7	21	20	20	Φ17.6-Φ17.8	RSKM-N3/8B-C-OM
NPT1/2	CU	6-12	21.3	8	22	24	24	Φ21.5-Φ21.7	RSKM-N1/2A-C-OM
NPT1/2		5-9	21.3	8	22	24	24	Φ21.5-Φ21.7	RSKM-N1/2B-C-OM
NPT3/4	CU	13-18	26.6	8	26	30	30	Φ26.8-Φ27.0	RSKM-N3/4A-C-OM
NPT3/4		9-16	26.6	8	26	30	30	Φ26.8-Φ27.0	RSKM-N3/4B-C-OM
NPT1	CU	18-25	33.4	10	31	40	40	Φ33.6-Φ33.8	RSKM-N1A-C-OM
NPT1		13-20	33.4	10	31	40	40	Φ33.6-Φ33.8	RSKM-N1B-C-OM
NPT1 1/4	CU	22-32	42.1	10	37	50	50	Φ42.3-Φ42.5	RSKM-N1 1/4A-C-OM
NPT1 1/4		20-26	42.1	10	37	50	50	Φ42.3-Φ42.5	RSKM-N1 1/4B-C-OM
NPT2	CU	37-44	60.3	11	38	67	67	Φ60.5-Φ60.7	RSKM-N2A-C-OM
NPT2		29-35	60.3	11	38	67	67	Φ60.5-Φ60.7	RSKM-N2B-C-OM

RSKM-NPT-L 普通金属电缆防水接头（加长）/Waterproof metal cable gland(lengthen)

型号 Thread Spec.	材质 Material	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
NPT1/4	CU	3-6.5	13.7	15	19	14	14	Φ13.9-Φ14.1	RSKM-N1/4A-L-C-OM
NPT1/4	CU	2-5	13.7	15	19	14	14	Φ13.9-Φ14.1	RSKM-N1/4B-L-C-OM
NPT3/8	CU	4-8	17.4	15	21	20	20	Φ17.6-Φ17.8	RSKM-N3/8A-L-C-OM
NPT3/8	CU	2-6	17.4	15	21	20	20	Φ17.6-Φ17.8	RSKM-N3/8B-L-C-OM
NPT1/2	CU	6-12	21.3	15	22	24	24	Φ21.5-Φ21.7	RSKM-N1/2A-L-C-OM
NPT1/2	CU	5-9	21.3	15	22	24	24	Φ21.5-Φ21.7	RSKM-N1/2B-L-C-OM
NPT3/4	CU	13-18	26.6	15	26	30	30	Φ26.8-Φ27.0	RSKM-N3/4A-L-C-OM
NPT3/4	CU	9-16	26.6	15	26	30	30	Φ26.8-Φ27.0	RSKM-N3/4B-L-C-OM
NPT1	CU	18-25	33.4	15	31	40	40	Φ33.6-Φ33.8	RSKM-N1A-L-C-OM
NPT1	CU	13-20	33.4	15	31	40	40	Φ33.6-Φ33.8	RSKM-N1B-L-C-OM
NPT1 1/4	CU	22-32	42.1	15	37	50	50	Φ42.3-Φ42.5	RSKM-N1 1/4A-L-C-OM
NPT1 1/4	CU	20-26	42.1	15	37	50	50	Φ42.3-Φ42.5	RSKM-N1 1/4B-L-C-OM
NPT2	CU	37-44	60.3	15	38	67	67	Φ60.5-Φ60.7	RSKM-N2A-L-C-OM
NPT2	CU	29-35	60.3	15	38	67	67	Φ60.5-Φ60.7	RSKM-N2B-L-C-OM

RSKM-M-NXD 普通多芯金属电缆防水接头/Waterproof metal cable gland with multi cores



* 特殊规格请垂询
For special specifications, please inquire

- 金属材料：黄铜镀镍
- 塑料材料：PA6或PA66
- 密封件：硅胶、EPDM或丁腈橡胶
- 温度范围：-40-100℃，短时120℃
- 产品特性：O型圈环槽，连接更紧密
  改进型护套，保护连接安全

- Material： Brass nickel–Plated
- Plastic material: PA6 or PA66
- Seals: Silicone, EPDM or NBR
- Temperature：–40℃–100℃，short term120℃
- Products Features:Connecting more smoothly with O–ring groove.
  Protecting connection safe by using improved protective sealings



型号 Thread Spec.	材质 Material	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
M22×1.5	CU	2×6	22	8	24	24	24	Φ22.2-Φ22.4	RSKM-M22A-2×6-C-OM
M25×1.5	CU	3×7	25	8	26	30	30	Φ25.2-Φ25.4	RSKM-M25A-3×7-C-OM
M25×1.5	CU	3×7+1×8.5	25	15	26	34	33	Φ25.2-Φ25.4	RSKM-M25A-3×7+1×8.5-L15-C-PM
M32×1.5	CU	4×9	32	10	33	40	40	Φ32.2-Φ32.4	RSKM-M32A-4×9-C-OM

RSKM-PG-NXD 普通多芯金属电缆防水接头/Waterproof metal cable gland with multi cores



* 特殊规格请垂询
For special specifications, please inquire

- 金属材料：黄铜镀镍
- 塑料材料：PA6或PA66
- 密封件：硅胶、EPDM或丁腈橡胶
- 温度范围：-40-100℃，短时120℃
- 产品特性：O型圈环槽，连接更紧密
  改进型护套，保护连接安全

- Material： Brass nickel–Plated
- Plastic material: PA6 or PA66
- Seals: Silicone, EPDM or NBR
- Temperature：–40℃–100℃，short term120℃
- Products Features:Connecting more smoothly with O–ring groove.
  Protecting connection safe by using improved protective sealings



型号 Thread Spec.	材质 Material	卡口范围 Cable range (Φ) mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	组合高度 Height (H)mm	螺帽扳手尺寸 Spanner (SW1)mm	主体扳手尺寸 Spanner (SW2)mm	建议安装板开孔尺寸 Installation hole size mm	货号 Item No.
PG29	CU	4×9	37	10	33	40	40	Φ37.2-Φ37.4	RSKM-PG29A-4×9-C-OM
PG29	CU	4×9	37	12	33	40	40	Φ37.2-Φ37.4	RSKM-PG29A-4×9-L12-C-OM
PG48	CU	6×12	59.3	11	41.6	67	67	Φ59.5-Φ59.7	RSKM-PG48A-6×12-C-OM
PG48	CU	6×12	59.3	10	41.6	65	67	Φ59.5-Φ59.7	RSKM-PG48A-6×12-L10-C-OM

RSKM2-M 全硅胶金属电缆防水接头/All silicone waterproof metal cable glands



* 特殊规格请垂询
For special specifications, please inquire

- 金属材料：黄铜镀镍
- 密封件：白色硅胶
- 温度范围：-50-80℃
- 产品特性：O型圈环槽，连接更紧密
  全橡胶防护套，保护连接安全

- Material： Brass nickel–Plated
- Seal: white silicone
- Temperature：–50℃–80℃
- Products Features:Connecting more smoothly with O–ring groove.
  Protecting connection safe by using improved protective sealings



电缆规格 Cable Spec. (mm^2)	电缆外径（参考） Cable outer diameter (reference) (Φ)mm	型号 Thread Spec	过线范围（参考） Line range (reference)	主体扳手 Spanner (SW1)mm	螺帽扳手 Spanner (SW2)mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	紧固圈内径 Fastening ring (d0)	建议中心距 Center distance CL	主体内孔直径 Body inner diameter	最大外形直径 Outer diameter	拉拔力(N)（参考） Pulling force
70	18.5-20.5	RSKM2-M32A-C-O	17-21	36	36	32	9	22	>45	24.5	39.5	55-70
50	17.5-19	RSKM2-M30A-C-O	15-20	34	34	30	9	20	>42	24	37	45-55
50	17.5-19	RSKM2-M30*2A-C-O	15-20	34	34	30	9	20	>42	24	37	45-55
35	13-15.5	RSKM2-M25B-C-O	14-17	28	30	25	7	17	>38	18.4	33	40-50
25	12.5-14	RSKM2-M25A-C-O	12-15	28	28	25	7	15.4	>35	18.6	30	35-42
25	12.5-14	RSKM2-M22C-C-O	12-15	28	28	22	7	15.4	>35	18.6	30	35-42
16/25	11.5-13	RSKM2-M20A-C-O	10-13.5	27	27	20	8	13.5	>34	16	29	30-35
10	7.5-9	RSKM2-M18A-C-O	6-9	22	22	18	7	9	>29	10.8	24	25-30
10*0.75多芯/ With multi cores	8.5-9	RSKM2-M16C-C-O	6-9.5	22	22	16	7	9.5	>29	10.8	24	25-30
10*0.4多芯/ With multi cores	6.5-7	RSKM2-M16A-C-O	5-7	18	18	16	7	7.4	>25	10.2	20	20-25





RSKM-EMV.SP-M 弹簧式屏蔽金属电缆防水接头/Spring Shielded Metal Cable Gland



* 特殊规格请垂询
For special specifications, please inquire

- 金属材料：黄铜镀镍
- 弹簧材料：SUS304
- 密封件：橙色硅胶
- 温度范围：-50-180℃
- 产品特性：O形圈环槽，连接更紧密
  全橡胶防护套，保护连接安全
- 结构：（紧固件：全橡胶）

- Metal：Brass nickel-plated
- Spring：SUS304
- Seal:Silicone Gel(Orange)
- Temperature:-50 -180C
- Feature：O-ring groove with tighten connection.
  Full rubber sheeve for safely connection
- Structure: (fastener: plastic clamping claw + rubber)



型号 Thread Spec.	过线范围（参考） Line range (reference)	屏蔽范围（参考） Shielding range	主体扳手 Spanner (SW1)mm	螺帽扳手 Spanner (SW2)mm	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	紧固圈内径 Fastening ring (d0)	建议中心距 Center distance CL	弹簧内径 Inner diameter of spring	主体内孔直径 Body inner diameter	建议安装板开孔尺寸 Hole Size mm
RSKM-EMV.SP-M36A-C-O	21-25	17.5-21	40	40	36	8	25	>50	17.3-17.5	27	Φ36.3-Φ36.5
RSKM-EMV.SP-M36×2.0A1-C-O	21-25	17.5-21	40	40	36	8	25	>50	17.3-17.5	27	Φ36.3-Φ36.5
RSKM-EMV.SP-M36×2.0B-C-O	21-25	17.5-21	40	40	36	8	25	>50	17.3-17.5	27	Φ36.3-Φ36.5
RSKM-EMV.SP-M32A-C-O	17-22	15-18	36	36	32	9	22	>45	14.5-14.8	24	Φ32.2-Φ32.4
RSKM-EMV.SP-M32B-C-O	17-20	13-16	36	34	32	9	20	>45	12.5-12.8	23	Φ32.2-Φ32.4
RSKM-EMV.SP-M27A-C-O	15-19	13-16	30	30	27	7.5	18.5	>38	12.5-12.8	19	Φ27.2-Φ27.4
RSKM-EMV.SP-M25C-C-O	15-18.5	13-16	28	30	25	7.5	18.5	>38	10.8-11.1	18.5	Φ25.2-Φ25.4
RSKM-EMV.SP-M25B-C-O	14-17	10-13	28	30	25	7.5	17	>28	9.7-10	18.5	Φ25.2-Φ25.4
RSKM-EMV.SP-M25A-C-O	12-16	10-13	28	28	25	7.5	16	>35	9.7-10	16.6	Φ25.2-Φ25.4
RSKM-EMV.SP-PG16C-C-O	12-15	9-11	24	24	22.5	7.5	19.6	>31	7.2-8.5	15.6	Φ22.7-Φ22.9
RSKM-EMV.SP-M20A-C-O	10-13.5	10.5-11.5	27	27	20	8	13.5	>34	8.2-8.5	13.5	Φ20.2-Φ20.4
RSKM-EMV.SP-M18A-C-O	6-9	6-7	22	22	18	7	10	>29	5.2-5.5	10	Φ18.2-Φ18.4
RSKM-EMV.SP-M18B-C-O	8-11.5	9-10.5	22	22	18	7	11.5	>29	8.2-8.5	11.2	Φ18.2-Φ18.4
RSKM-EMV.SP-M16C-C-O	6-9.5	6-7	22	22	16	7	10	>29	5.2-5.5	9.4	Φ16.2-Φ16.4

RSKM-EMV.SP-M 弹簧式屏蔽金属电缆防水接头/Spring Shielded Metal Cable Gland



* 特殊规格请垂询
For special specifications, please inquire

- 金属材料：黄铜镀镍
- 弹簧材料：SUS304
- 密封件：橙色硅胶
- 温度范围：-50-180℃
- 产品特性：O形圈环槽，连接更紧密
  全橡胶防护套，保护连接安全
- 结构：（紧固件：全橡胶）

- Metal：Brass nickel-plated
- Spring：SUS304
- Seal:Silicone Gel(Orange)
- Temperature:-50 -180C
- Feature：O-ring groove with tighten connection.
  Full rubber sheeve for safely connection
- Structure: (fastener: plastic clamping claw + rubber)



型号 Thread Spec.	过线范围（参考） Line range (reference)	屏蔽范围（参考） Shielding range	主体扳手 Spanner (SW1)mm	螺帽扳手 Spanner (SW2)mm	刺穿螺母扳手 SW3	螺纹外径 Thread OD (AG)mm	螺纹长度 Thread length (GL)mm	紧固圈内径 Fastening ring (d0)	建议中心距 Center distance CL	弹簧内径 Inner diameter of spring	主体内孔直径 Body inner diameter	建议安装板开孔尺寸 Body inner diameter
RSKM-EMV.SP-M40A-L10-C-OM1	18-25	17.5-21	50	42	45	40	10	25.5	>65	16-16.3	27	Φ40.3-Φ40.5
RSKM-EMV.SP-M25A3-L10-C-OM1	8-14	5-7.5	30	24	30	25	10	14.2	>35	4.2-4.5	14.2	Φ25.2-Φ25.4
RSKM-EMV.SP-M20B1-L10-C-OM1	6.3-10.3	5-7.5	27	27	27	20	10	10.5	>34	4.2-4.5	13.6	Φ20.2-Φ20.4
RSKM-EMV.SP-M20B2-L10-C-OM1	5.7-9.5	5-7.5	27	27	27	20	10	14.2	>34	4.2-4.5	13.6	Φ20.2-Φ20.4
	9.5-13.6	5-7.5	27	27	27	20	10	14.2	>34	4.2-4.5	13.6	Φ20.2-Φ20.4
RSKM-EMV.SP-M20C-L10-C-OM1	10.7-13.9	8.5-11	27	27	27	20	10	14.2	>34	7.2-7.5	13.6	Φ20.2-Φ20.4
RSKM-EMV.SP-M16A-L10-C-OM1	5.4-8.0	5-7.5	22	22	22	16	10	8.2	>29	4.2-4.5	9.4	Φ16.2-Φ16.4
RSKM-EMV.SP-M16B-L10-C-OM1	4.3-7.0	5-7.5	22	22	22	16	10	7.2	>29	4.2-4.5	9.4	Φ16.2-Φ16.4
RSKM-EMV.SP-M16C1-L10-C-OM1	6.5-9.8	5-7.5	22	22	22	16	10	10.2	>29	4.2-4.5	9.4	Φ16.4-Φ16.6
RSKM-EMV.SP-M12B-L8-C-OM1	4.2-6.2	3.5-5.5	20	20	20	12	8	6.2	>29	3.0-3.3	8.4	Φ12.2-Φ12.4
RSKM-EMV.SP-M12C-L8-C-OM1	5.2-8.1	4.5-5.5	20	20	20	12	8	8.2	>29	3.0-3.3	8.4	Φ12.2-Φ12.4

IP 防护等级说明/Protection Level Descriptions

防护等级说明符合EN60529电气标准

Degrees of protection provided by enclosures (IP-Code) according to IEC 60529

接触保护和外来物保护等级，第一参数

Protection against solid foreign objects, marked first index

第一参数	防护等级 简述	详细描述
0	无防护	
1	防护50mm 直径和更大的固体外来体	防护球体物质，直径大于50mm，不应完全进入
2	防护12.5mm直径和更大的固体外来体	防护球体物质，直径大于12.5mm，不应完全进入
3	防护2.5mm直径和更大的固体外来体	防护球体物质，直径大于2.5mm，不应完全进入
4	防护1.0mm直径和更大的固体外来体	防护球体物质，直径大于1.0mm，不应完全进入
5	防护灰尘	不可能完全阻止灰尘进入，但灰尘进入的数量不会对设备造成危害
6	灰尘封闭	完全防止灰尘进入
	注：球体的直径不应穿过柜体的孔	

First Index	Protection grade Short description	Definition
0	None–Protected	
1	Protection against solid foreign objects of 50mm diameter and greater	The object probe,sphere of 50 mm diameter,shall not fully penetrate*
2	Protection against solid foreign objects of 12.5mm diameter and greater	The object probe,sphere of 12.5 mm diameter,shall not fully penetrate*
3	Protection against solid foreign objects of 2.5mm diameter and greater	The object probe,sphere of 2.5 mm diameter,shall not fully penetrate at all*
4	Protection against solid foreign objects of 1.0mm diameter and greater	The object probe,sphere of 1.0 mm diameter,shall not fully penetrate at all*
5	Dust–Protected	Ingress of dust is not totally prevented. But dust shall not penetrate in a quantity to interfere with satisfactory operation of apparatus or to impair safety
6	Dust–tight	No ingress of dust
	Note:The full diameter of the object probe shall not pass through an opening of the enclosure	

防水保护等级，第二参数

Protection against water, marked second index

第二参数	防护等级 简述	详细描述
0	无防护	
1	水滴防护	垂直落下的水滴不应引起损害
2	倾斜15度时，防护水滴	向任何一侧倾斜15度角时，垂直落下的水滴不应引起损害
3	防护溅出的水	以60度角从垂直线两侧溅出的水,不应引起损害
4	防护喷水	从每个方向对准柜体的喷水都不应引起损害
5	防护射水	从每个方向对准柜体的射水都不应引起损害
6	防护强射水	从每个方向对准柜体的强射水都不应引起损害
7	防护短时浸水	在标准压力下短时浸入水中时，不应有能引起损害的水量浸入
8	防护长期浸水	可以在特定的条件下浸入水中，不应有能引起损害的水量浸入

Second Index	Protection grade Short description	Definition
0	None–Protected	
1	Protection against failing water drops	Vertically failling drops shall have no harmful effects
2	Protection against failing water drops when enclosure tilted up to 15°	Vertically failling drops shall have no harmful effects when the enclosure is tilted at any angle up to 15° on either side of the vertical
3	Protection against spraying water	Water sprayed at an angle up to 60° on either side of the vertical shall have no harmful effects
4	Protection against splashing water	Water splashed against the enclosure from any direction shall have to harmful effects
5	Protection against water jet	Water projected in jets against the enclosure from any direction shall have to harmful effects
6	Protection against powered water jets	Water projected in powerful jets against the enclosure from any direction shall have to harmful effects
7	Protected against the effects of temporary immersion in water	Ingress of water in quantities effects shall not be possible when enclosure is temporarily immersed in water under standardised conditions of pressure and time
8	Protected against the effects of continuous immersion in water	Ingress of water in quantities causing harmful effects shall not be possible when enclosure is continuously immersed in water under conditions which shall be agreed between manufacturer and user but which are more severe than for numeral?

例：IP 6 8

Example：IP 6 8

螺纹标准及开孔数据 /Thread standard



M型 螺纹/thread

公制ISO螺纹EN60423 Metric ISO thread to EN60423

公制螺纹 Metric thread	螺距 Pitch	螺纹外径D1 Nominal Size	螺纹内径D2 Core diameter	开孔尺寸D3 Bore through
M12X1.5	1.5	12	10.5	12.2–12.4
M14X1.5	1.5	14	12.5	14.2–14.4
M16X1.5	1.5	16	14.5	16.2–16.4
M18X1.5	1.5	18	16.5	18.2–18.4
M20X1.5	1.5	20	18.5	20.2–20.4
M22X1.5	1.5	22	20.5	22.2–22.4
M25X1.5	1.5	25	23.5	25.2–25.4
M32X1.5	1.5	32	30.5	32.2–32.4
M36X1.5	1.5	36	34.5	36.3–36.5
M40X1.5	1.5	40	38.5	40.3–40.5
M50X1.5	1.5	50	48.5	50.3–50.5
M63X1.5	1.5	63	61.5	63.3–63.5
M72X2.0	2.0	72	70.0	72.3–72.5
M80X2.0	2.0	80	78.0	80.3–80.5



PG型 螺纹/thread

德制PG螺纹 DIN 40430 PG thread to DIN 40430

公制螺纹 Metric thread	螺距 Pitch	螺纹外径D1 Nominal Size	螺纹内径D2 Core diameter	开孔尺寸D3 Bore through
PG7	1.270	12.5	11.28	12.7–12.9
PG9	1.410	15.2	13.86	15.4–15.6
PG11	1.410	18.6	17.26	18.8–19.0
PG13.5	1.410	20.4	19.06	20.6–20.8
PG16	1.410	22.5	21.16	22.7–22.9
PG21	1.588	28.3	26.78	28.5–28.7
PG29	1.588	37.0	35.48	37.3–37.5
PG36	1.588	47.0	45.48	47.3–47.5
PG42	1.588	54.0	52.48	54.3–54.5
PG48	1.588	59.3	57.78	59.6–59.8



NPT型 螺纹/thread





G型 螺纹/thread

美制NPT锥螺纹 NPT(conical) American pipa thread

公制螺纹 Metric thread	螺距 Pitch	螺纹外径D1 Nominal Size	螺纹数量 Number of theads	开孔尺寸D3 Bore through
NPT 1/4	1.411	13.716	18	13.9–14.1
NPT 3/8	1.411	17.415	18	13.9–14.1
NPT 1/2	1.814	21.336	14	21.5–21.7
NPT 3/4	1.814	26.67	14	26.8–27.0
NPT 1	2.208	33.4	11 1/2	33.6–33.8
NPT 1 1/4	2.208	42.164	11 1/2	42.4–42.7
NPT 1 1/2	2.208	48.26	11 1/2	48.6–48.8
NPT 2	2.208	60.352	11 1/2	60.8–61.0
NPT 2 1/2	3.175	73.025	8	73.3–73.5
NPT 3	3.175	88.9	8	90.2–90.4
NPT 3 1/2	3.175	101.6	8	101.9–102.1

英制G管螺纹 DIN ISO 228 G thread to DIN ISO 228

公制螺纹 Metric thread	螺距 Pitch	螺纹外径D1 Nominal Size	螺纹内径D2 Core diameter	开孔尺寸D3 Bore through
G1/4	1.337	13.157	11.145	13.4–13.6
G3/8	1.337	16.662	14.950	16.9–17.1
G1/2	1.814	20.955	18.631	21.2–21.4
G3/4	1.814	26.411	24.117	26.6–26.8
G1	2.309	33.249	30.291	33.5–34.7
G1 1/4	2.309	41.910	38.952	42.3–42.5
G1 1/2	2.309	47.803	44.845	48.1–48.3
G2	2.309	59.614	56.656	59.9–60.1
G2 1/2	2.309	75.184	72.226	75.5–75.7
G3	2.309	87.884	84.926	88.2–88.4
G3 1/2	2.309	100.330	97.372	100.6–100.8
G4	2.309	113.03	110.072	113.3–113.5

螺纹扭矩 VDE 0619 Thread torque VDE 0619

螺纹规格 Thread specification	夹紧螺帽 The clamping nut 塑料 Plastic	夹紧螺帽 The clamping nut 金属 Metal	螺母 Nut 塑料 Plastic	螺母 Nut 金属 Metal
M12/PG7	1.3	3.5	1.2	4.17
M16/PG9	2.5	6.25	1.5	4.17
M18/PG11	3.75	6.25	2.0	4.17
M20/PG13.5	3.75	6.25	2.0	4.17
M22/M24/PG16	5.0	7.5	3.33	5.0
M25	7.5	10	3.33	6.67
M27/PG21	7.5	10	5.0	6.67
M32/M36/PG29	7.5	10	5.0	6.67
M40/PG36	7.5	10	5.0	6.67
M50/PG42	7.5	10	5.0	6.67
M63/PG48	10	12.5	5.0	6.67

